



Building leaders in the sustainable management of **contaminated land and groundwater**

Adelaide Branch Event – 30 July 2024

The highs and lows of sinusoidal hydraulic testing

Developing an alternative method for characterising aquifer hydraulic properties


Chris Turnadge¹, Eddie Banks², Margaret Shanafield², Todd Rasmussen³, Ron Kreymborg⁴, Kieran Harford⁴

¹ CSIRO, ² Flinders University, ³ University of Georgia (USA), ⁴ Kremford Pty Ltd

30 July 2024 | Australian Land and Groundwater Association Technical Event

This research was funded by CSIRO's Deep Earth Imaging Future Science Platform

Copyright 2024 ALGA confidential



Tonight:

“Minimum viable product”:

This presentation is at least **interesting** to you



Tonight:

“Minimum viable product”:

This presentation is at least **interesting** to you




Best possible outcome:

This research is of **benefit** to you



Content – A linear, but circular story

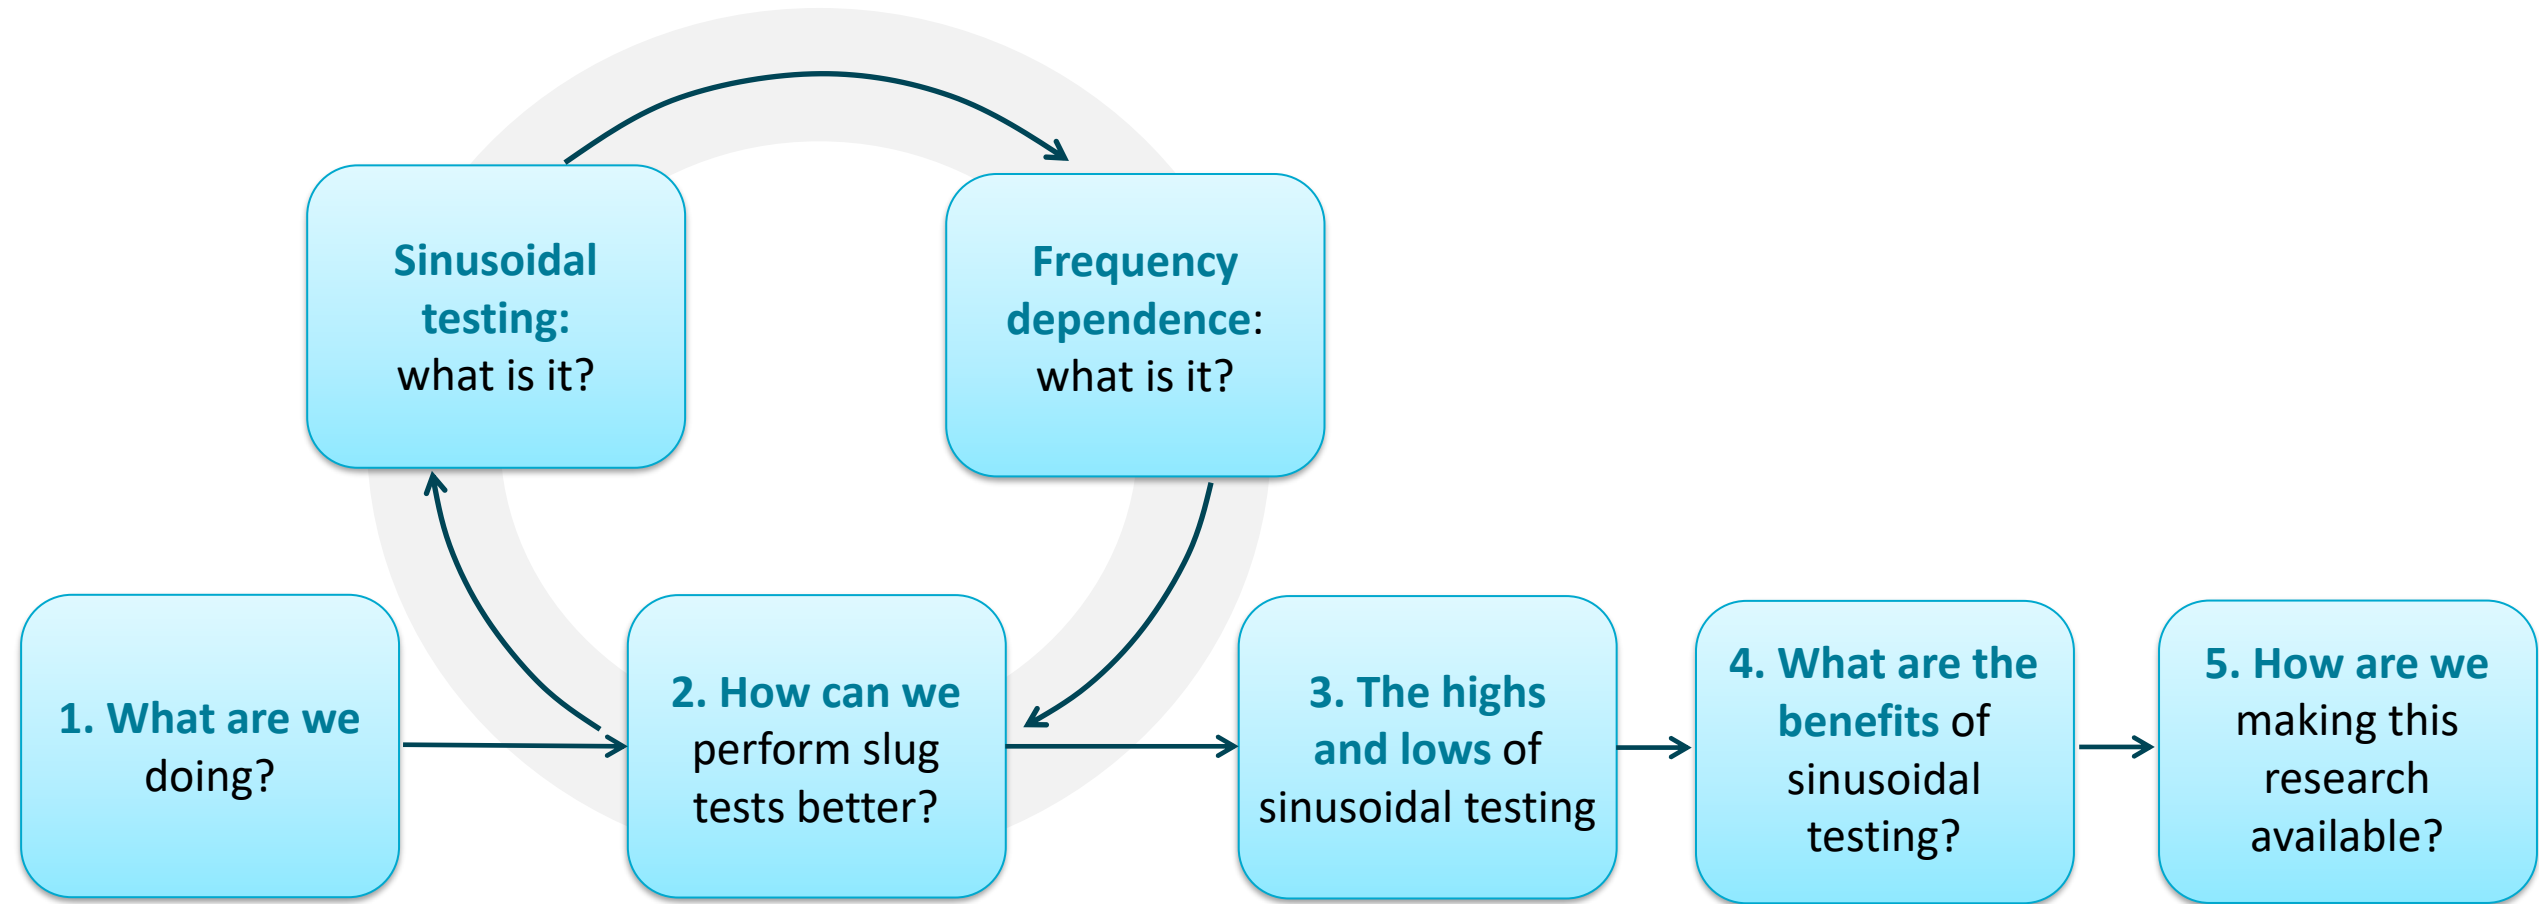

1. What are we doing?

In a nutshell...

- **What are we doing?**


Developing methods of sinusoidal hydraulic testing

- **Why?**

To robustly estimate hydraulic properties, particularly in more challenging hydrogeological settings

- **How?**

Using a transient method of two-well slug testing

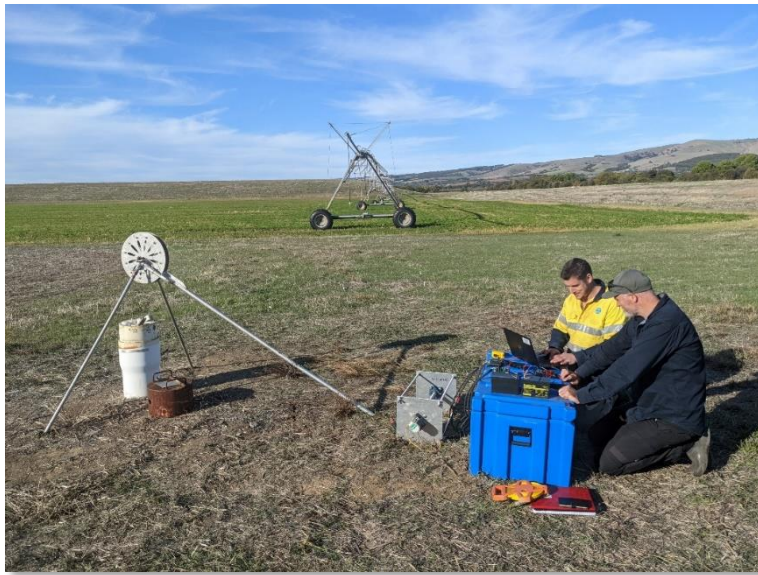

2. How can we perform slug tests better?

Pros and cons of traditional slug testing methods

Advantages



- Rapid
- Low cost
- Simple to perform
- Simple to analyse
- Can characterise low permeability units
- Extraction of water not required

(Butler, 2019)

Pros and cons of traditional slug testing methods

Advantages



- Rapid
- Low cost
- Simple to perform
- Simple to analyse
- Can characterise low permeability units
- Extraction of water not required

(Butler, 2019)

Disadvantages




- Can require **long times** to re-equilibrate
- Can be affected by **borehole storage**
- Can be affected by **skin effects**
- Can't measure response at a **second well**
- Can't estimate **storage** reliably
- Can be affected by systematic measurement **errors**
- Unsuitable for **large diameter** wells or **high permeability** units

(Butler, 2019; Chapuis, 2015)


Sidebar 1:

What is sinusoidal slug testing?




Familiar territory: Traditional **falling head slug** tests (single well)

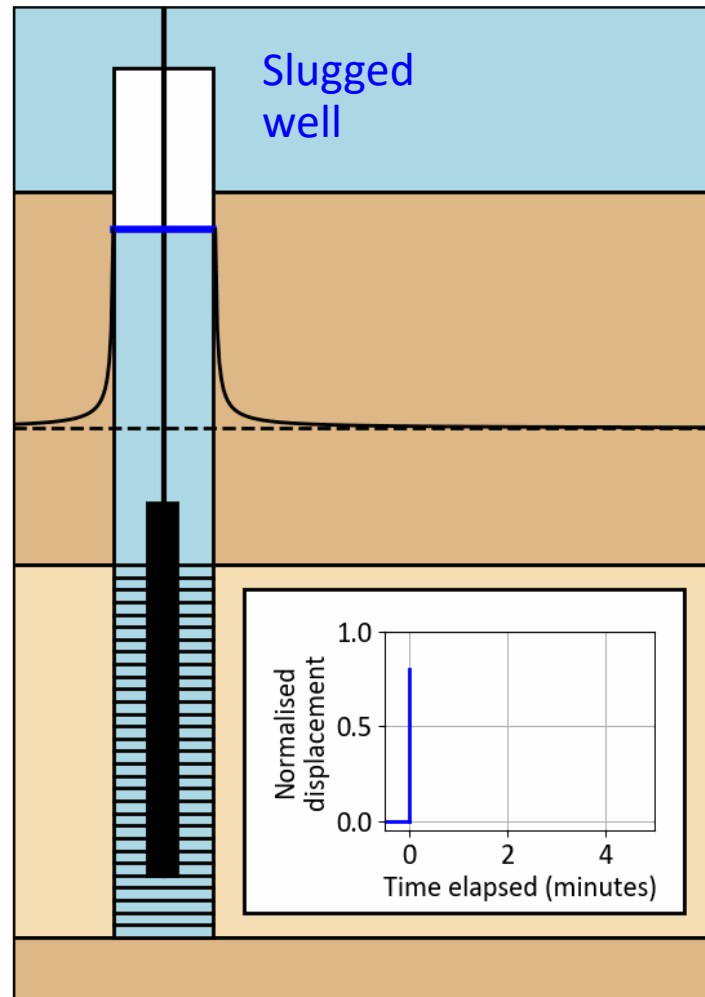

Familiar territory: Traditional **falling head slug** tests (two wells)

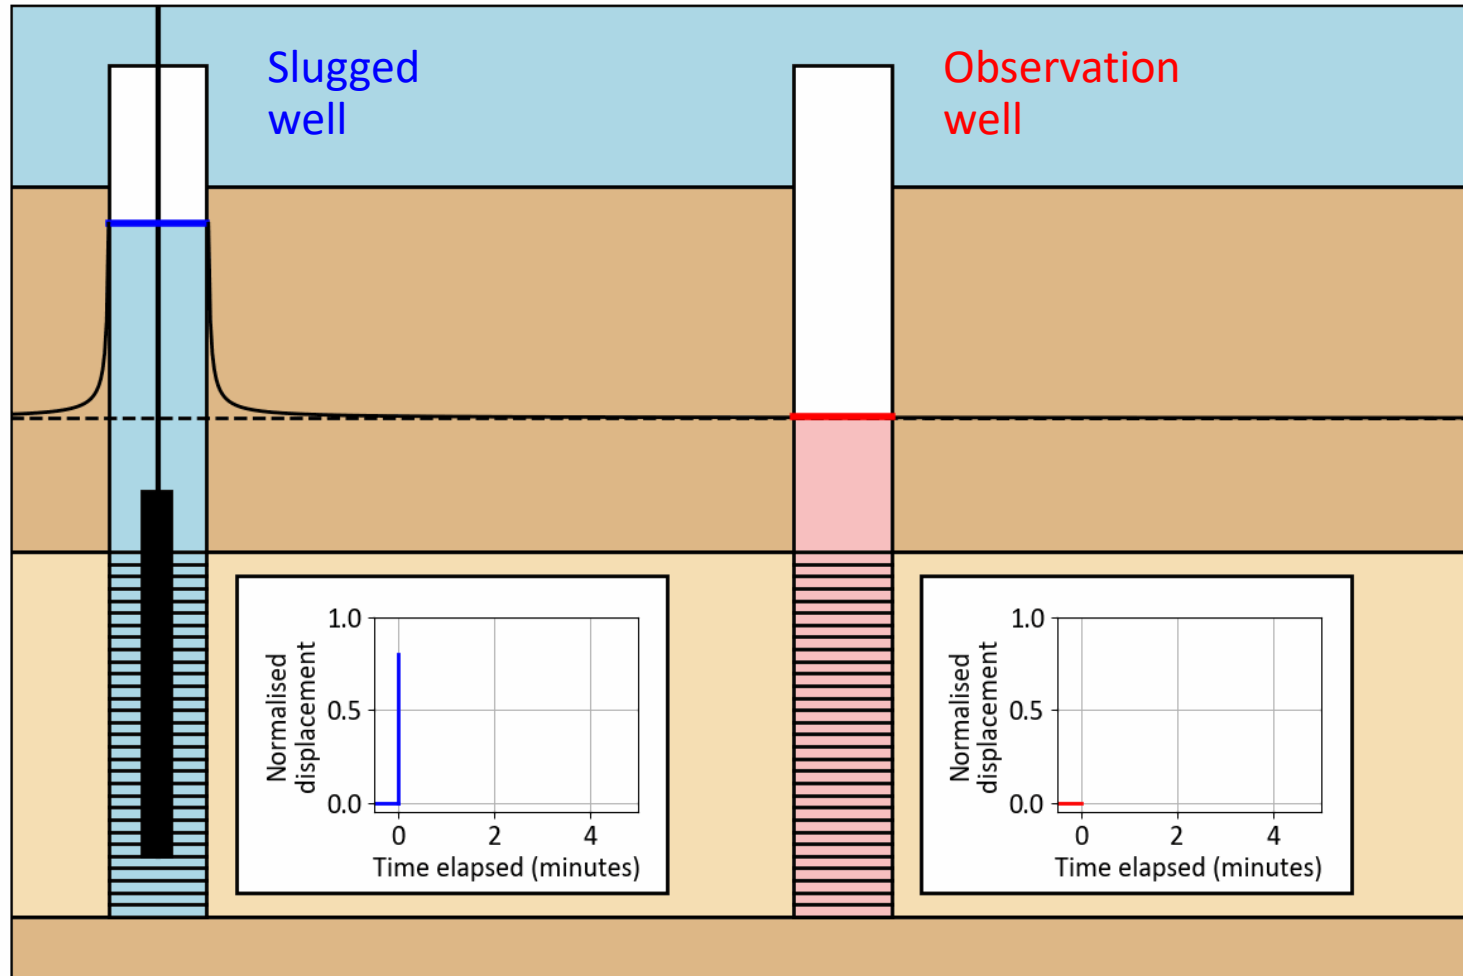

Unfamiliar territory: Sinusoidal slug tests

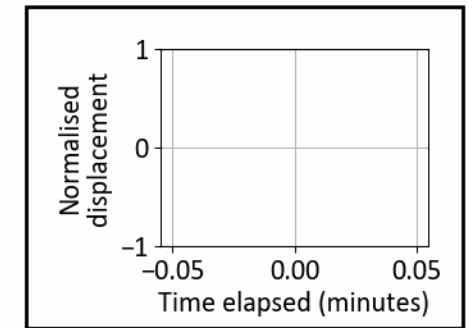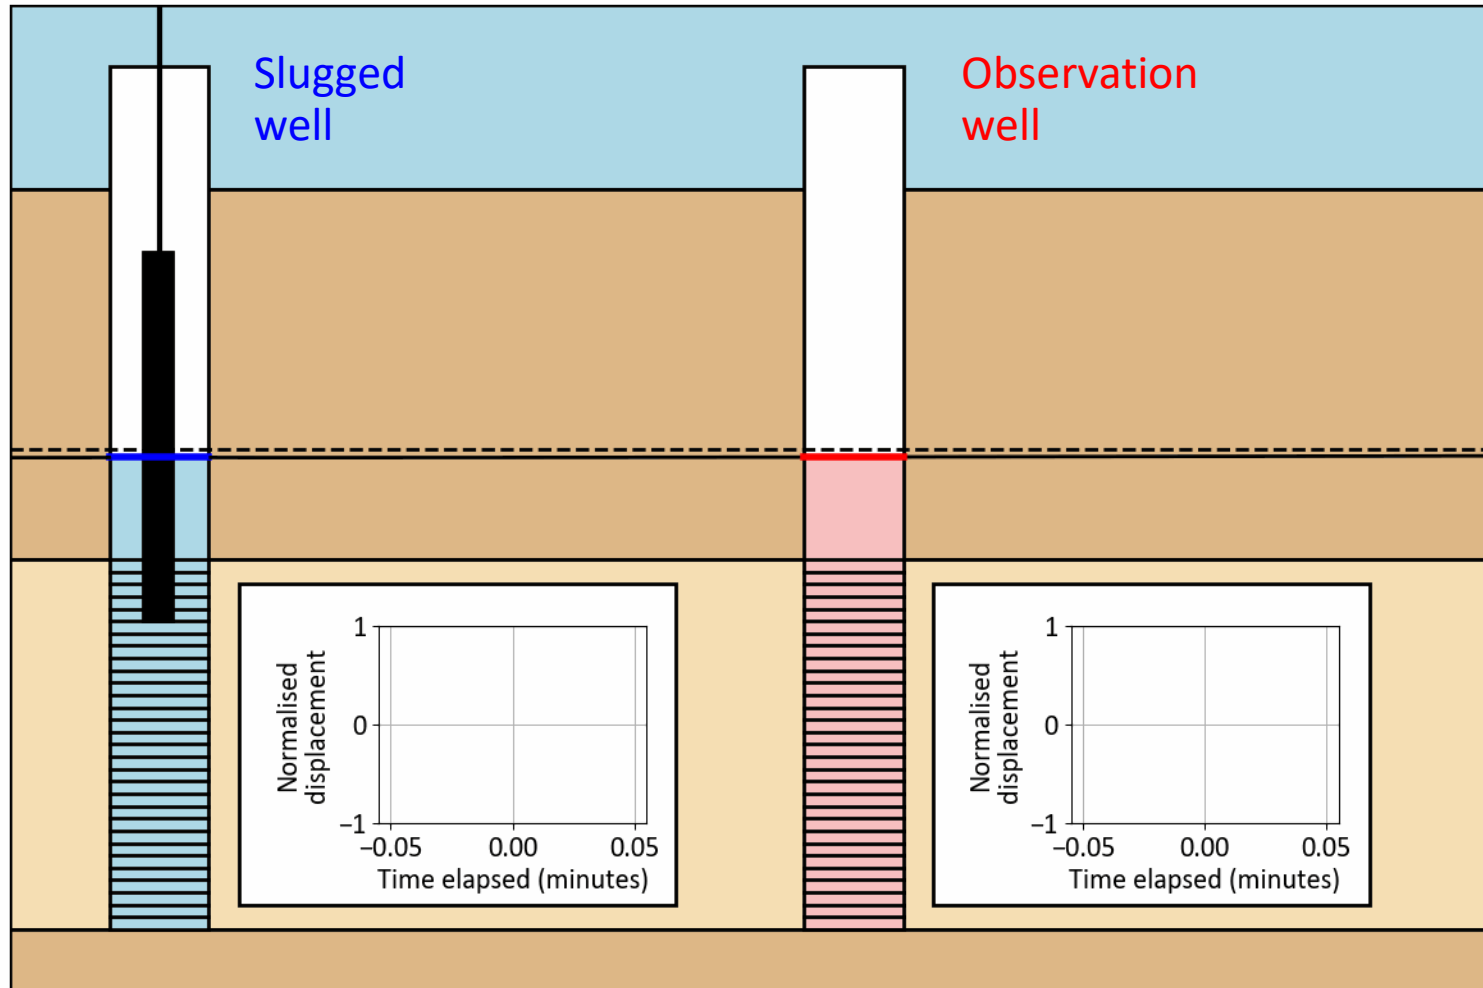

Sidebar 2:

What is frequency dependence?

Analogies – Body composition testing

Traditional method

Skin fold testing



(<https://www.essendonsportsmedicine.com.au/services/skinfold-assessment>)

Analogies – Body composition testing

Traditional method

Skin fold testing




(<https://www.essendonsportsmedicine.com.au/services/skinfold-assessment>)

Modern method

Bioelectrical impedance analysis



(<https://ultrarunning.com/featured/garmin-index-s2-smart-scale-review/>)

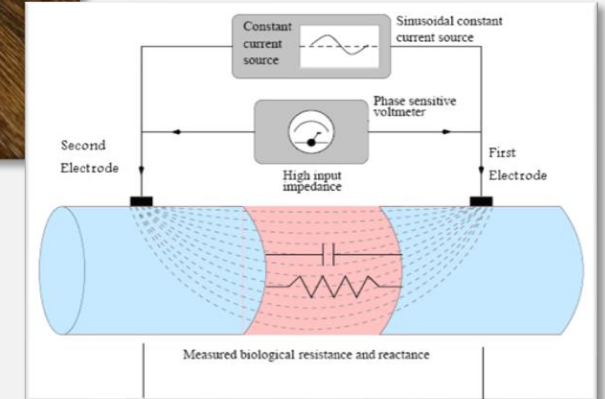

(https://www.researchgate.net/figure/Two-electrode-system_fig3_235337266)


Analogies – Medical imaging

Traditional method

Magnetic resonance imaging



(<https://hospitalresearch.org.au/news/latest-news/sa-first-imaging-technology-to-improve-parkinsons-diagnosis-2/>)

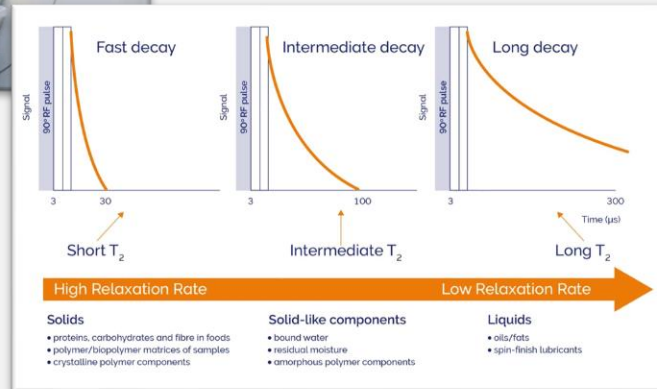

(<https://nmr.oxinst.com/application-detail/what-is-td-nmr>)


Analogies – Medical imaging

Traditional method

Magnetic resonance imaging




(<https://hospitalresearch.org.au/news/latest-news/sa-first-imaging-technology-to-improve-parkinsons-diagnosis-2/>)

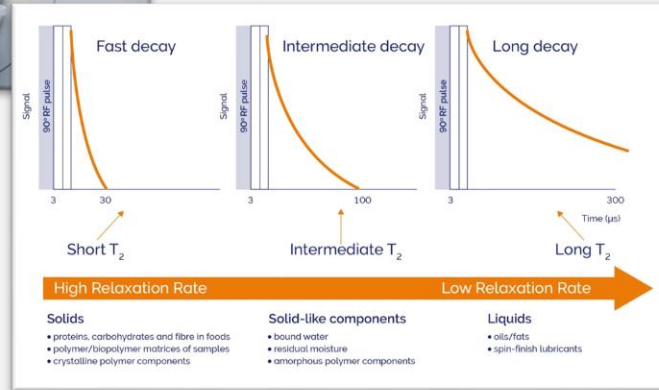


(<https://nmr.oxinst.com/application-detail/what-is-td-nmr>)

Modern method

Electrochemical impedance tomography

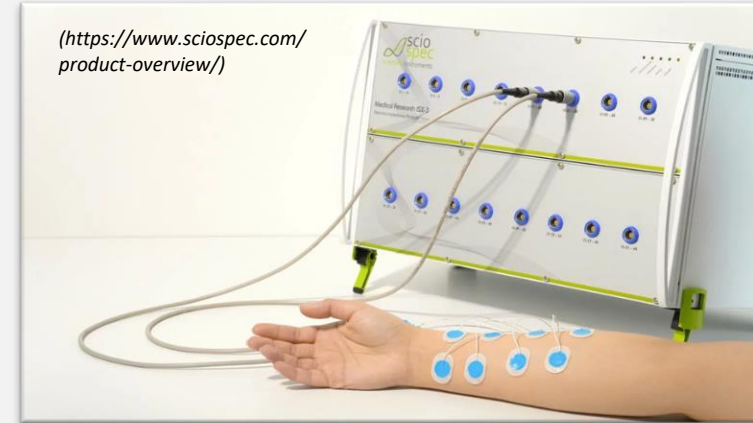

(<https://www.sciospec.com/product-overview/>)

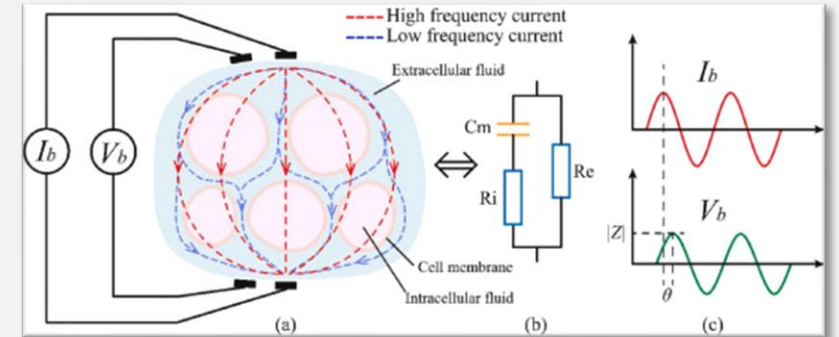


(<https://doi.org/10.1016/j.heliyon.2023.e15195>)


Analogies – Battery testing

Traditional method

Direct current internal resistance

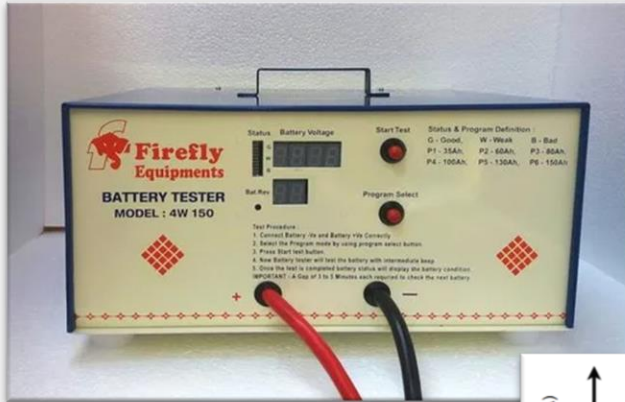

(<https://www.indiamart.com/proddetail/car-battery-load-tester-25472020091.html>)

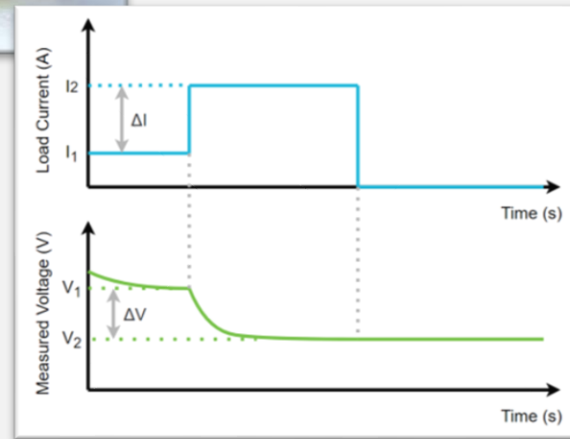


(<https://www.tek.com/en/blog/testing-battery-resistance>)


Analogies – Battery testing

Traditional method

Direct current internal resistance

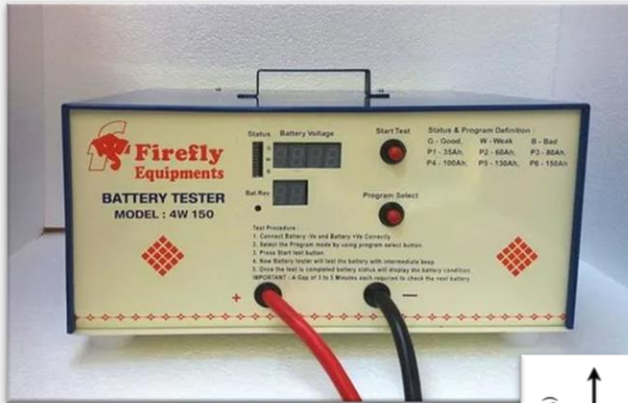


(<https://www.indiamart.com/proddetail/car-battery-load-tester-25472020091.html>)

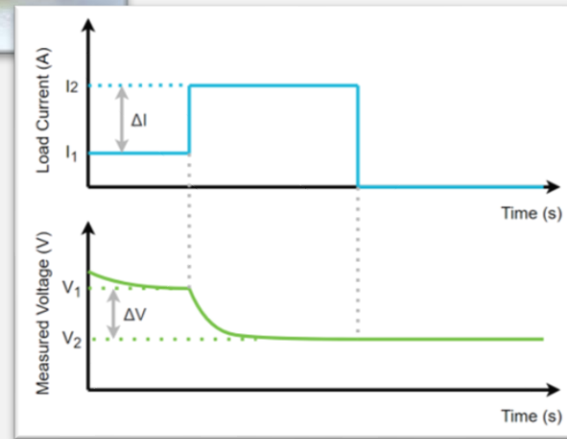

(<https://www.tek.com/en/blog/testing-battery-resistance>)

Modern method

Electrical impedance spectroscopy

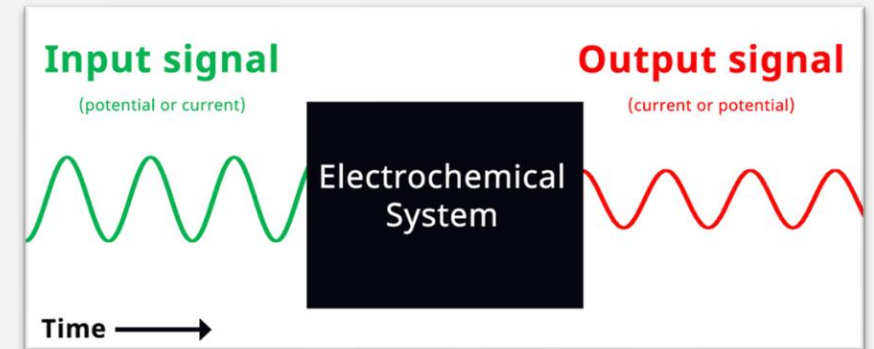


(<https://pinersearch.com/shop/kb/theory/eis-theory/eis-basics/>)

Analogies – Core permeametry

Traditional method

Transient pulse decay testing

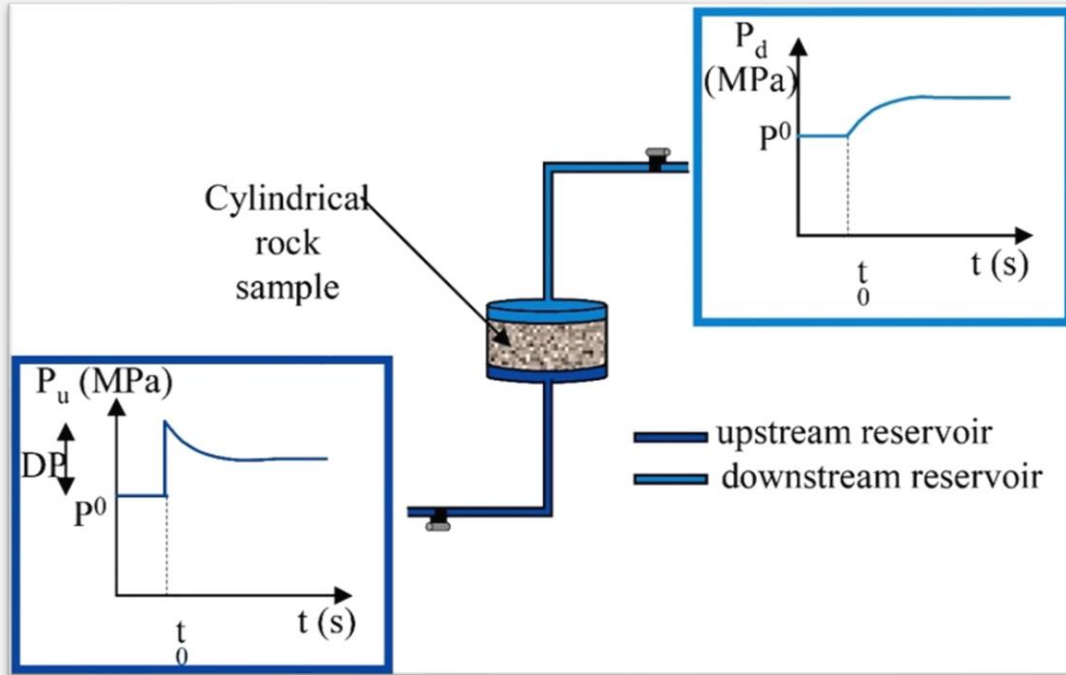


<https://doi.org/10.1016/j.enggeo.2018.10.019>

Analogies – Core permeametry

Traditional method


Transient pulse decay testing

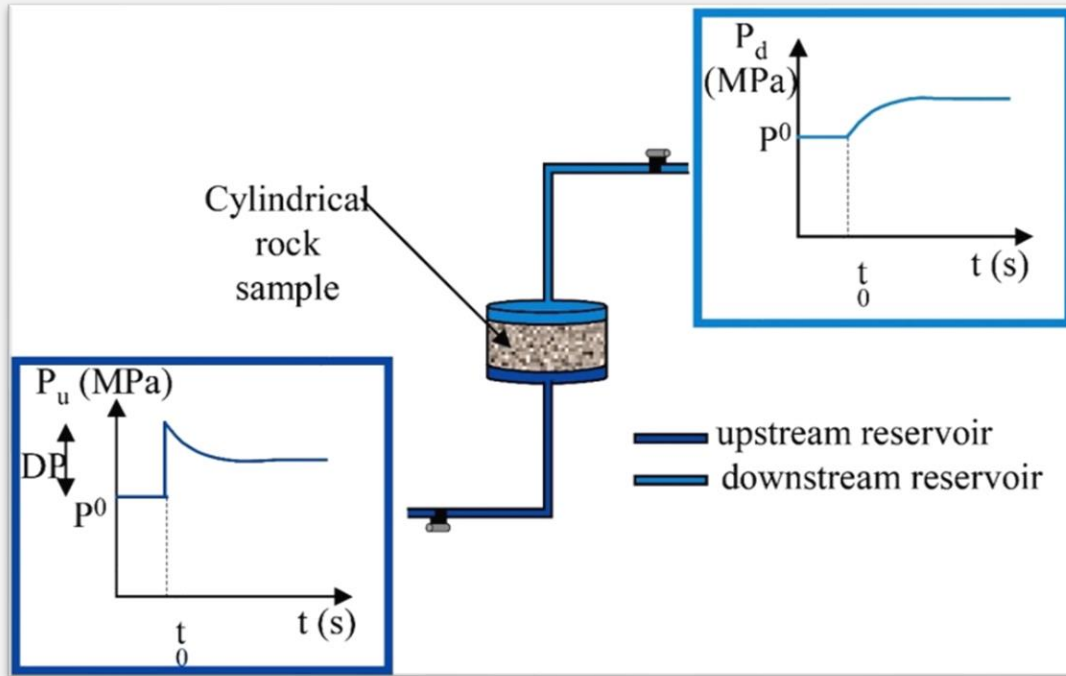

(<https://doi.org/10.1016/j.enggeo.2018.10.019>)

Modern method

Sinusoidal pressure or flow testing

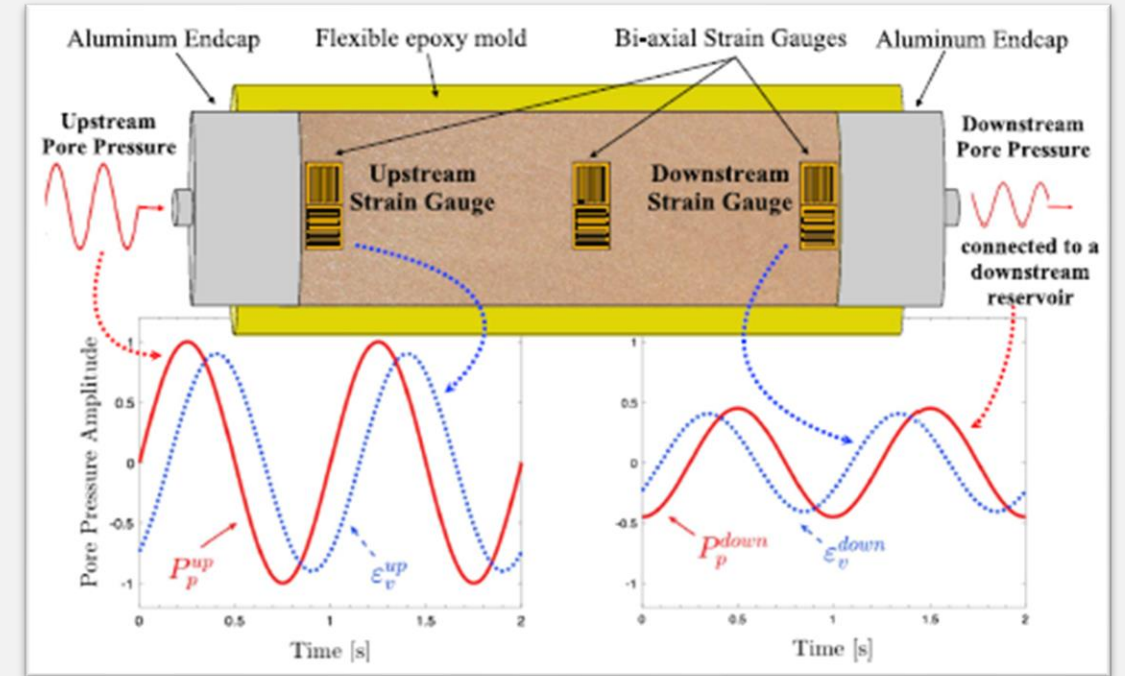


(Hasanov et al., 2019)


Analogies – Geophysical surveys

Traditional method

Time domain electromagnetic survey

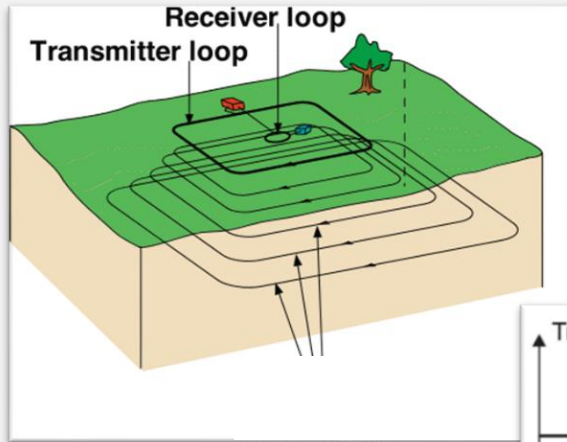

(<http://zonge.com/wp-content/uploads/2011/10/tdemIllustrationZongeInternational.gif>)

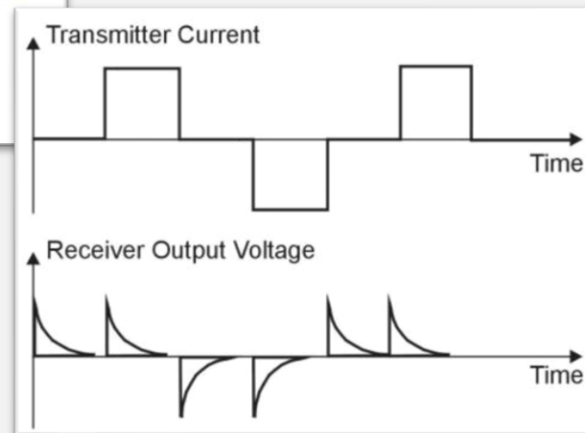


(https://archive.epa.gov/esd/archive-geophysics/web/html/time-domain_electromagnetic_methods.html)


Analogies – Geophysical surveys

Traditional method

Time domain electromagnetic survey

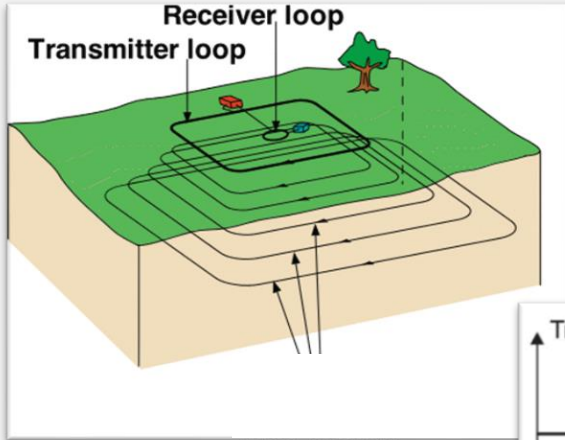

(<http://zonge.com/wp-content/uploads/2011/10/tdeIllustrationZongeInternational.gif>)

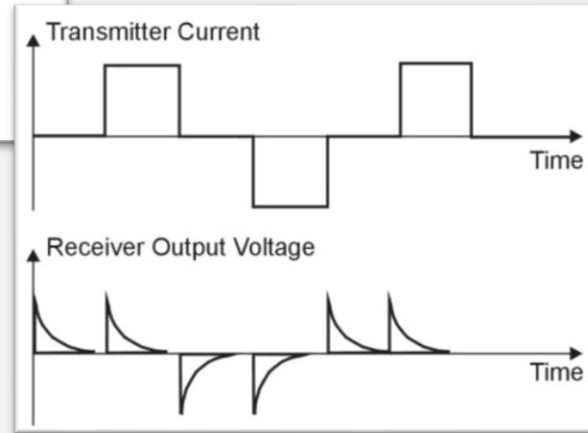


(https://archive.epa.gov/esd/archive-geophysics/web/html/time-domain_electromagnetic_methods.html)

Modern method

Frequency domain electromagnetic survey



(<https://www.loupegeophysics.com.au/>)




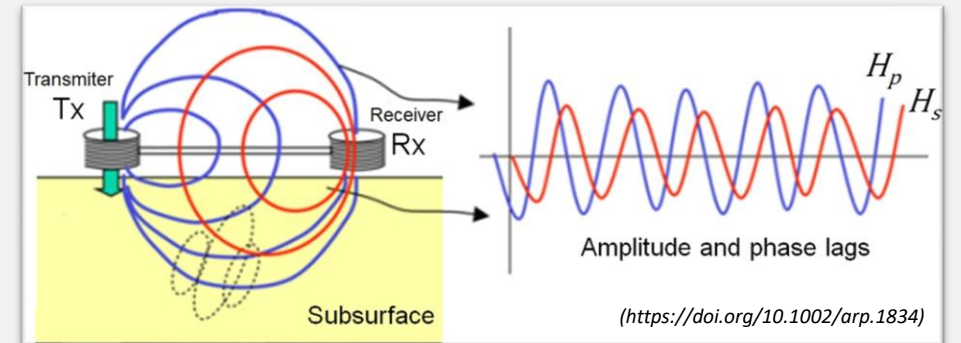


(<https://doi.org/10.1002/arp.1834>)

Summary of testing method analogies

Traditional methods






Often measure responses to **impulse** disturbances

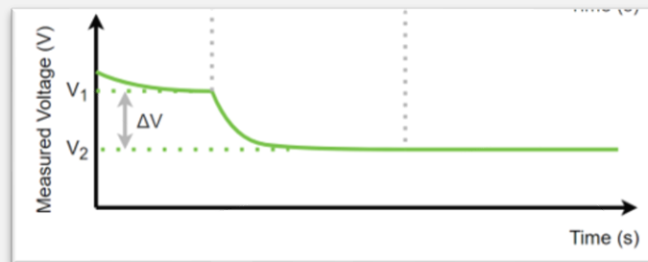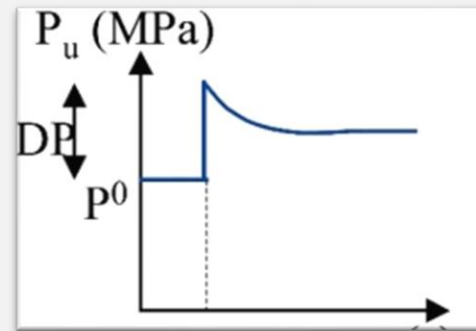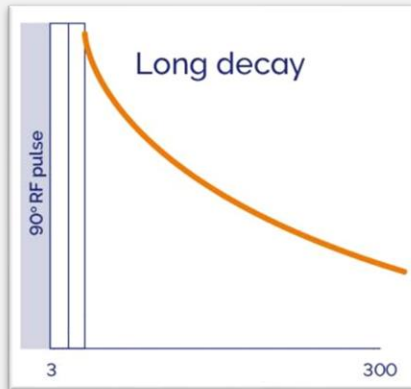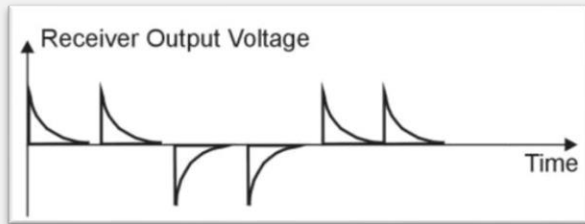

Modern methods


Include measuring responses to **frequency-dependent** disturbances

➤ These can persist **further** and be easier to measure **within noise**

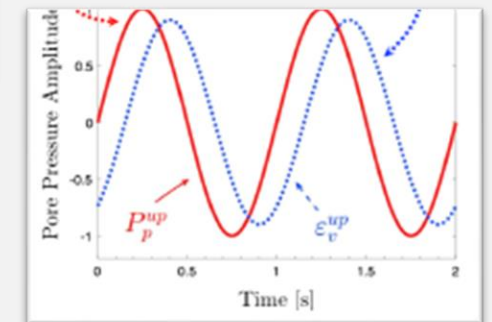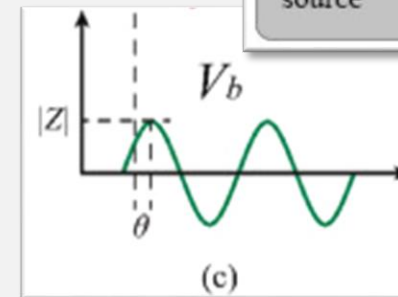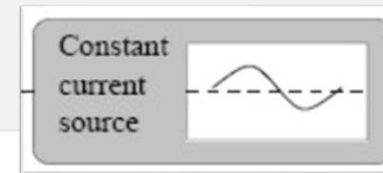
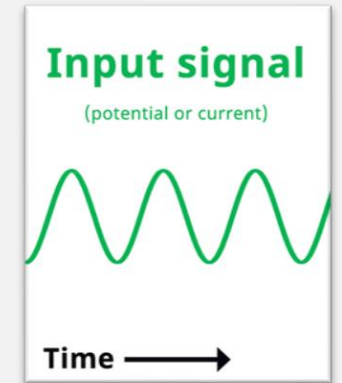
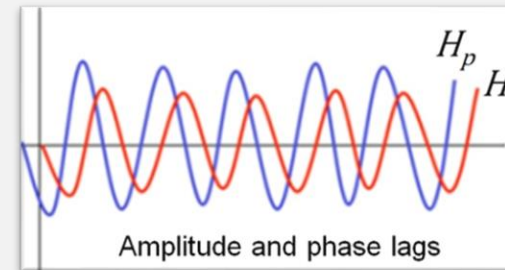


2. How can we perform slug tests better? (revisited)

Recap: Traditional **falling head slug** tests (two wells)

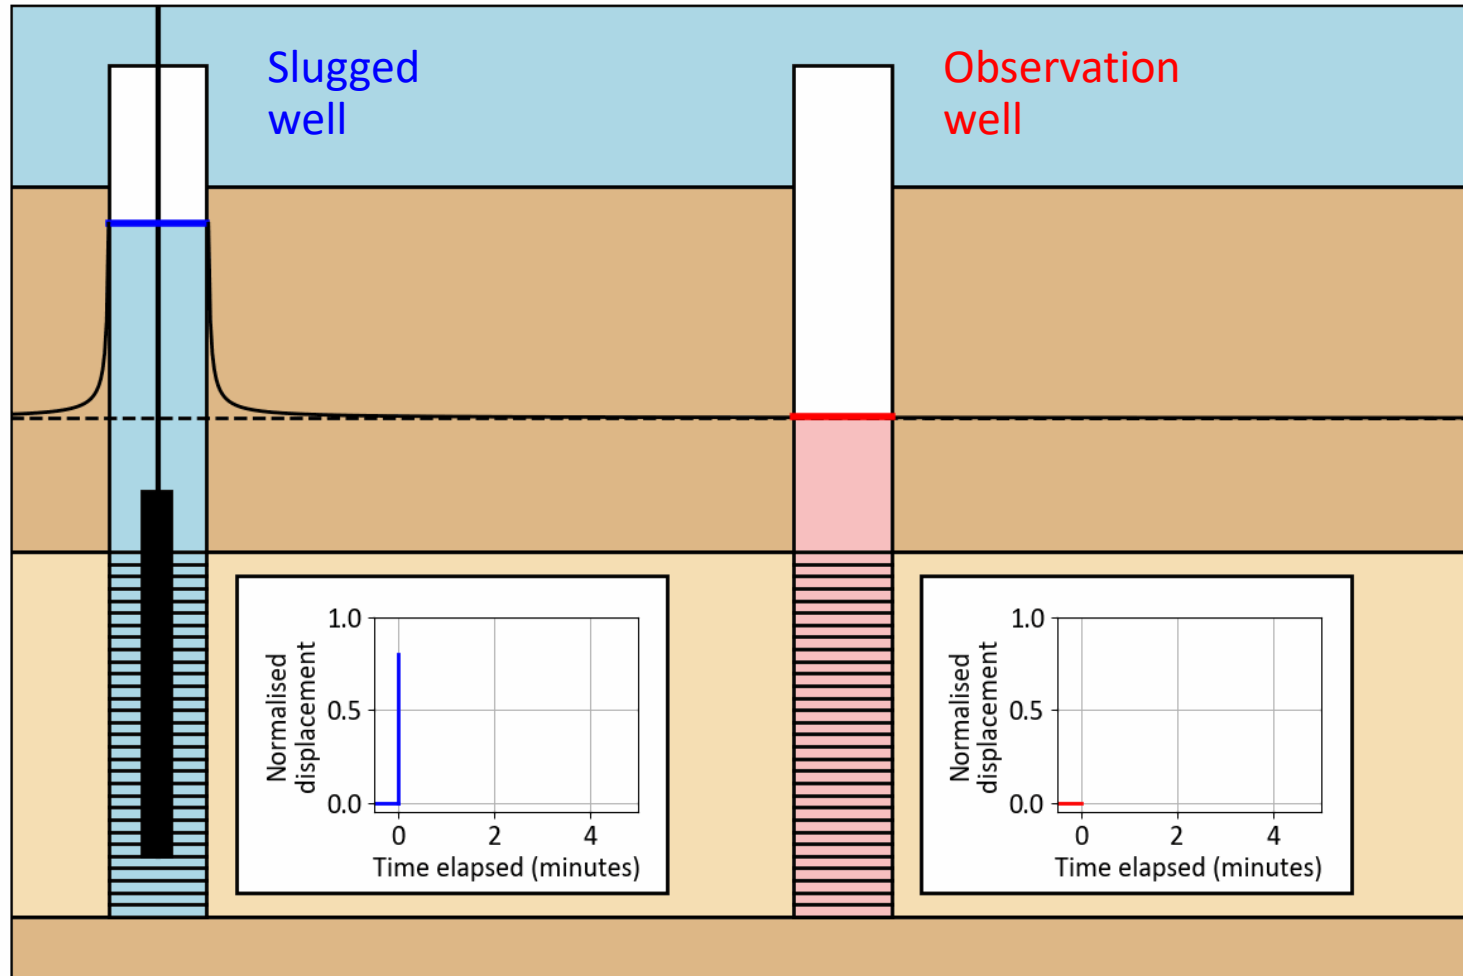

Recap: Sinusoidal slug tests

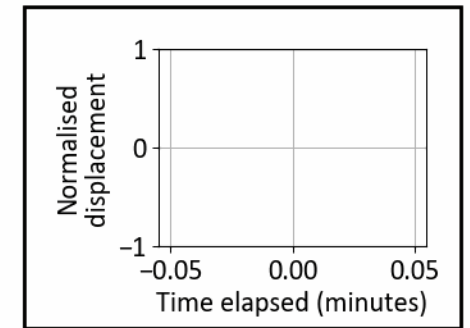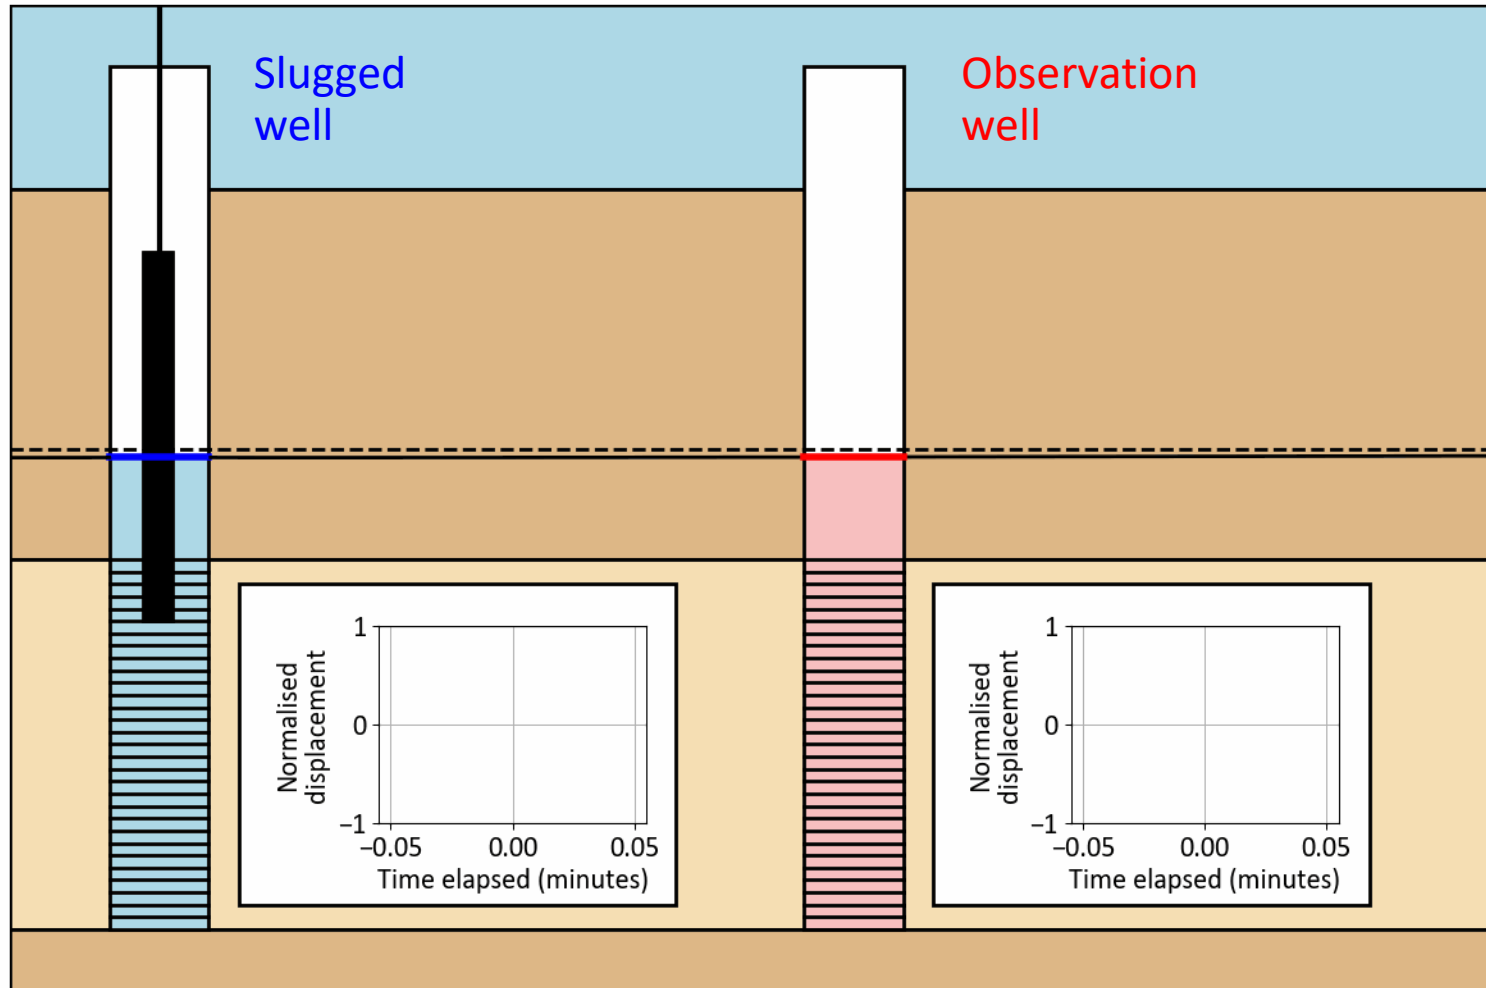

Field methods



Extendable 6-metre-long PVC slug (40 mm OD)

Field methods



Customised electronic winch



Extendable 6-metre-long PVC slug (40 mm OD)

Field methods



Customised electronic winch




Extendable 6-metre-long PVC slug (40 mm OD)



Real-time wireless measurements


Field methods: Prototype #1 – circa 2020

- Followed precedent set by **Guiltinan and Becker (2015)**
- Self-designed and assembled
- Cheap, off-the-shelf **DC stepper motor** and driver
- Repurposed a **data logger** for automated motor control
- **Research quality:** Lots of gaffer tape and zip ties!

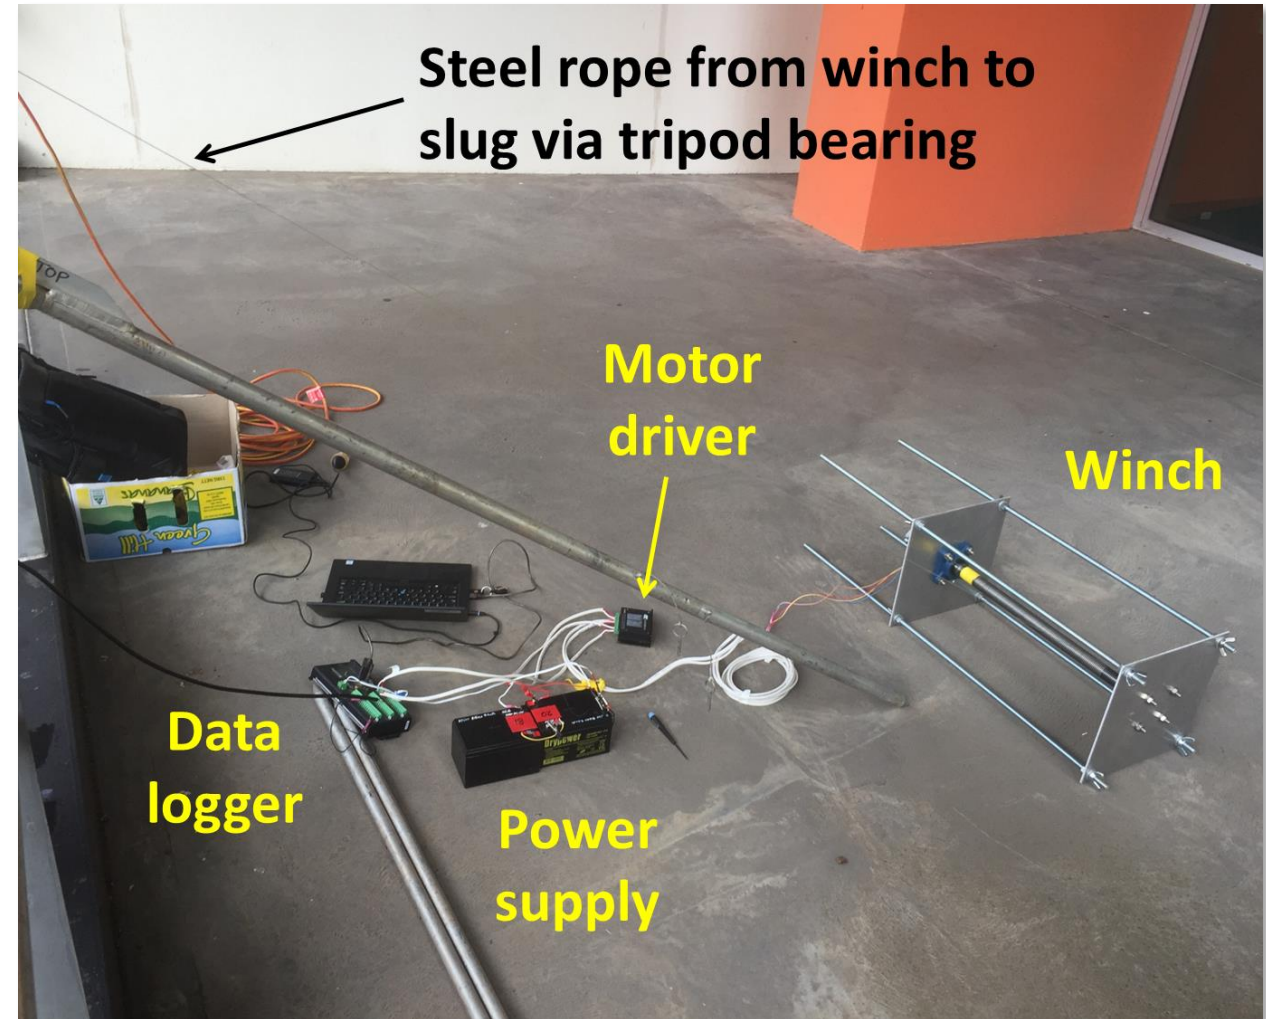

Field methods: Prototype #2 – circa 2022


- **Winch** fabricated by Adelaide firm Simax Engineering
 - **Motor control system** designed and manufactured by Melbourne engineering firm **Kremford**
 - **Real-time monitoring and visualisation system** designed and manufactured by Adelaide engineering firm Embedtronics
- **Tested** at various field sites around Adelaide
- **Field demonstration** at Australasian Groundwater Conference in Perth, 2022

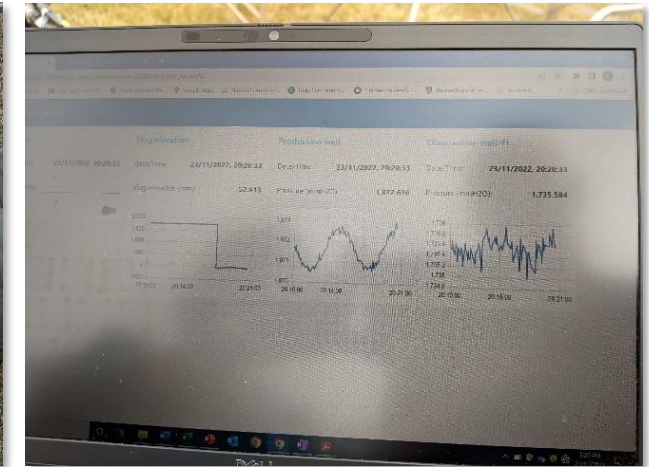

Reference point: Interpreting traditional pumping tests

For confined aquifers, we use the Theis (1935) solution:


$$s(t) = \frac{Q}{4\pi T} W\left(\frac{r^2 S}{T 4 t}\right)$$

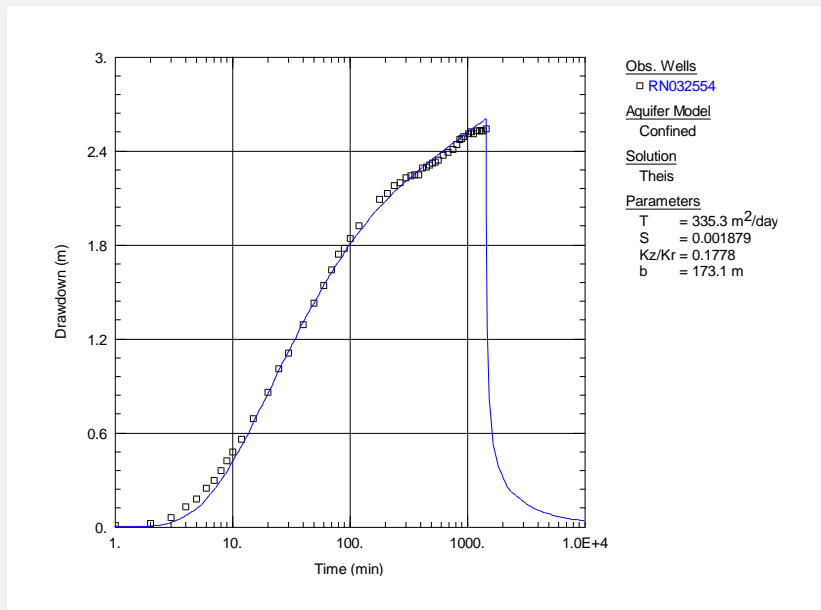

Sinusoidal slug tests


For confined aquifers, we use the Black and Kipp (1981) solution:

$$s(t) = \frac{Q e^{i\omega t}}{2\pi T} K_0\left(\sqrt{\frac{r^2 S i \omega}{T}}\right)$$

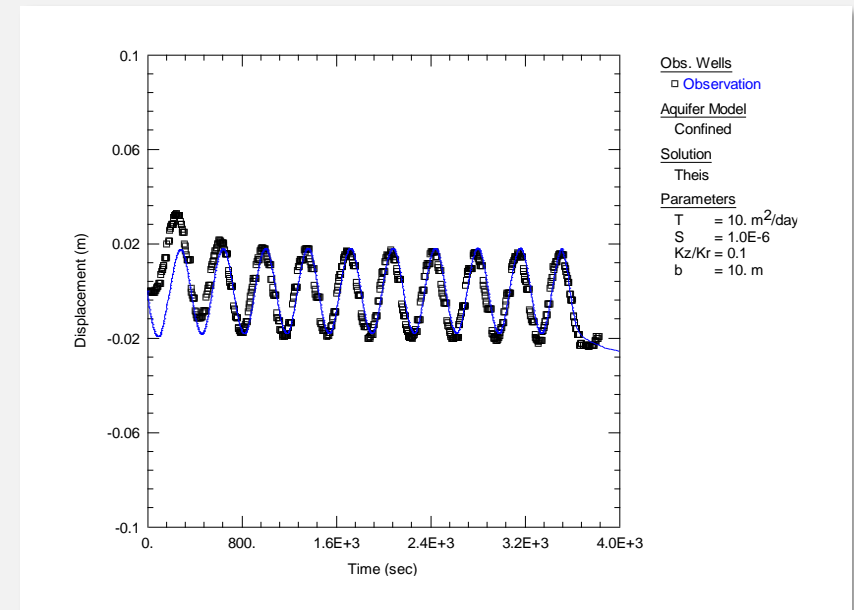


3. The **highs** and **lows** of sinusoidal slug testing


The **highs**: Aldinga field site

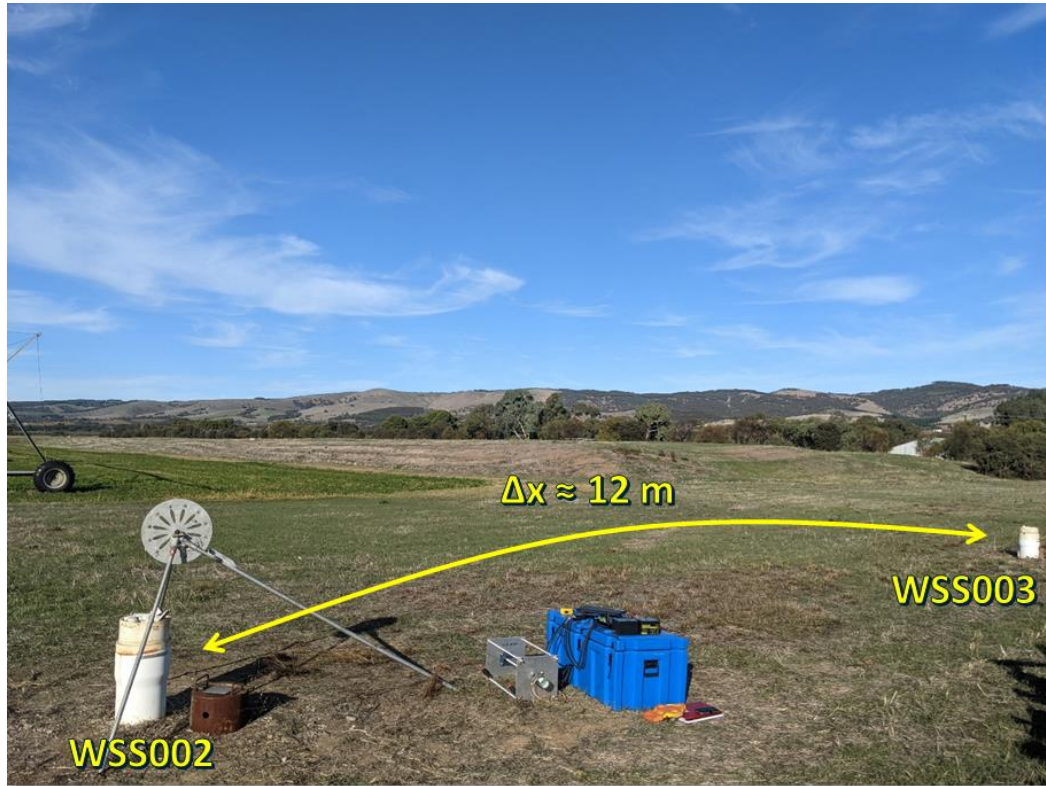

- Leaky **confined** aquifer (Port Willunga Formation)
- 50 mm diameter wells
 - Propagated sinusoidal signal up to 12 m

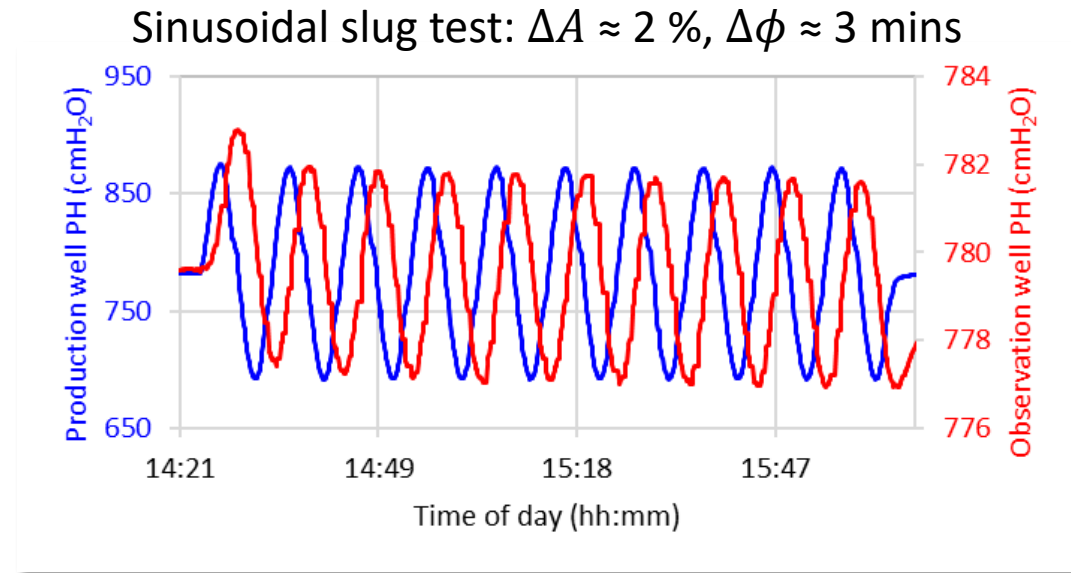


The **highs**: Aldinga field site

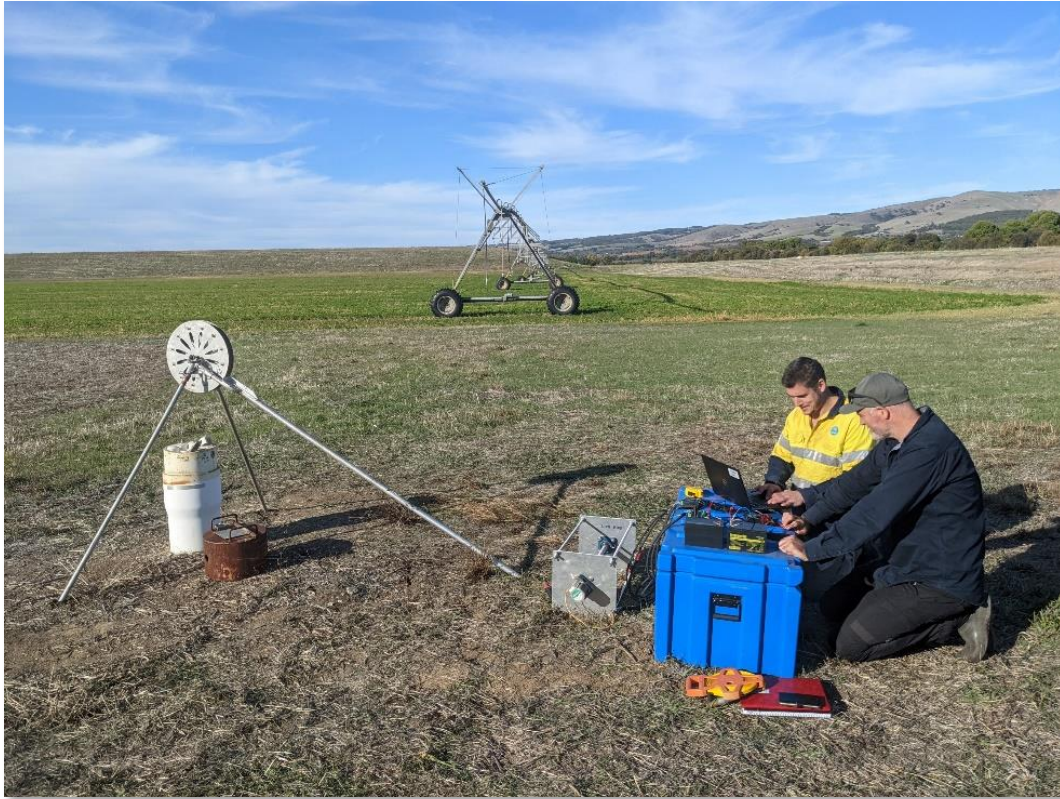


- Leaky **confined** aquifer (Port Willunga Formation)
- 50 mm diameter wells
 - Propagated sinusoidal signal up to 12 m




Sinusoidal slug test: $\Delta A \approx 2\%$, $\Delta\phi \approx 3$ mins

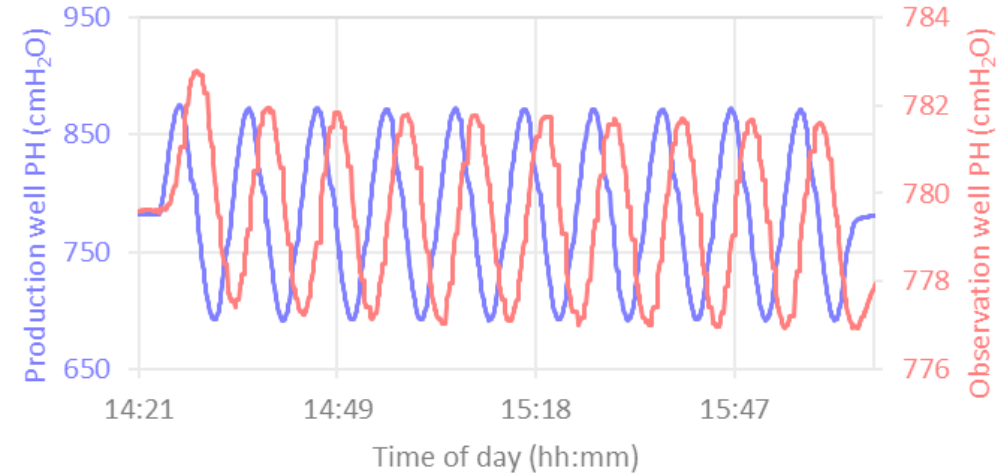

Falling head slug test: $\Delta P \approx 0.4$ m, $\Delta t \approx 3$ mins

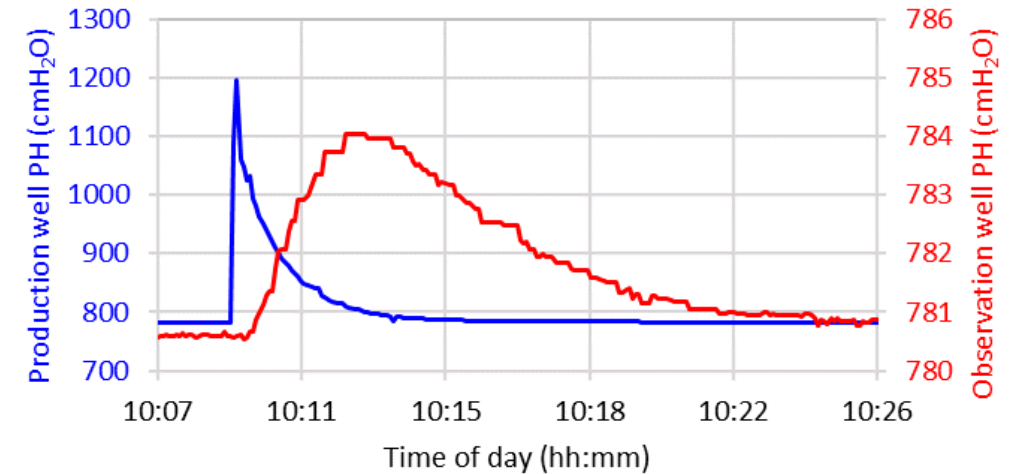

The **highs**: Aldinga field site

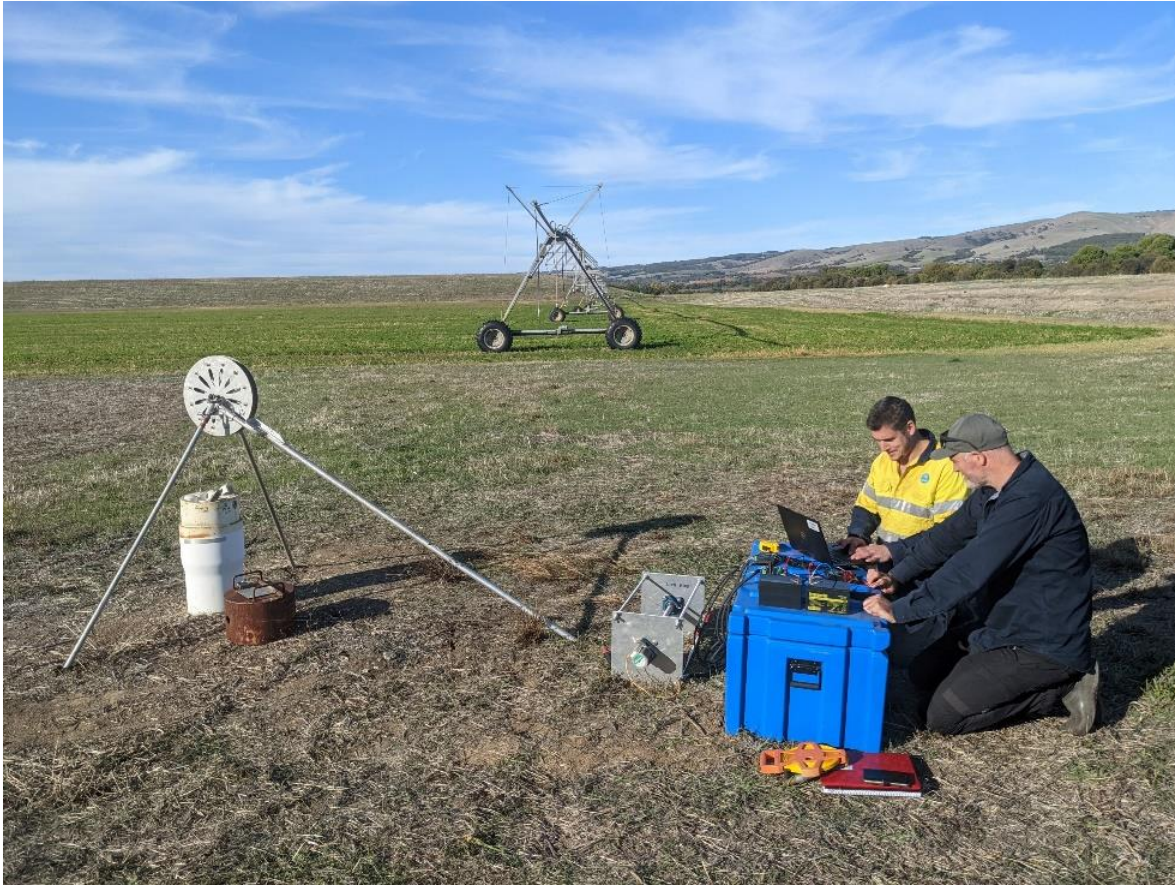

Modelled results

Traditional slug test: (single well)

- $T = 3.7 \text{ m}^2/\text{d}$
- $S = 4.2 \times 10^{-6}$

Sinusoidal slug test: (two wells)


- $T = 16 \text{ m}^2/\text{d}$
- $S = 4.0 \times 10^{-6}$

➤ **BUT!** These estimates are **not** directly comparable, due to differing spatial support

The **lows**: Balhannah field site



Sinusoidal slug test: no response

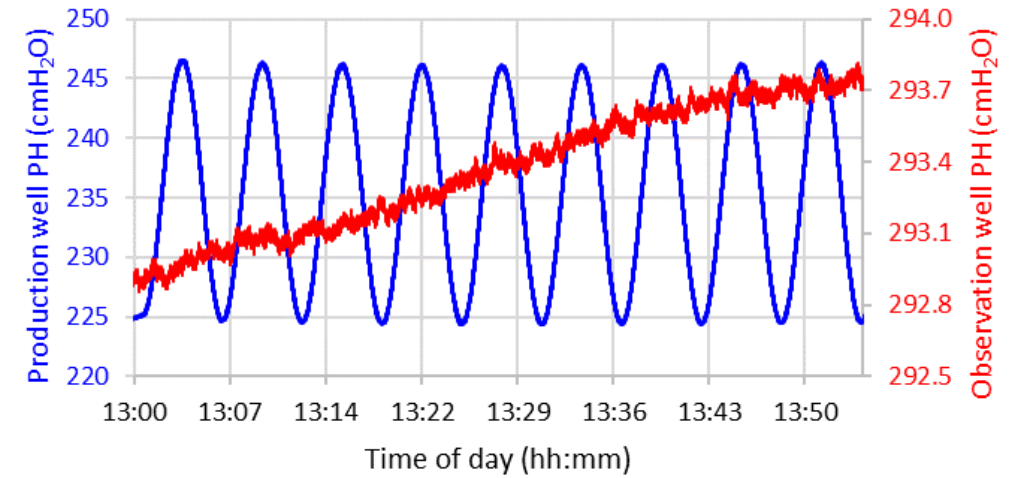


- Fractured rock aquifer (Woolshed Flat Shale)
- **200 mm diameter wells**
 - No measurable propagation of signal
 - Attributed to large diameter wells



The **highs**: McLaren Vale field site



Sinusoidal slug test: $\Delta A \approx 2 \%$, $\Delta\phi \approx 30$ seconds

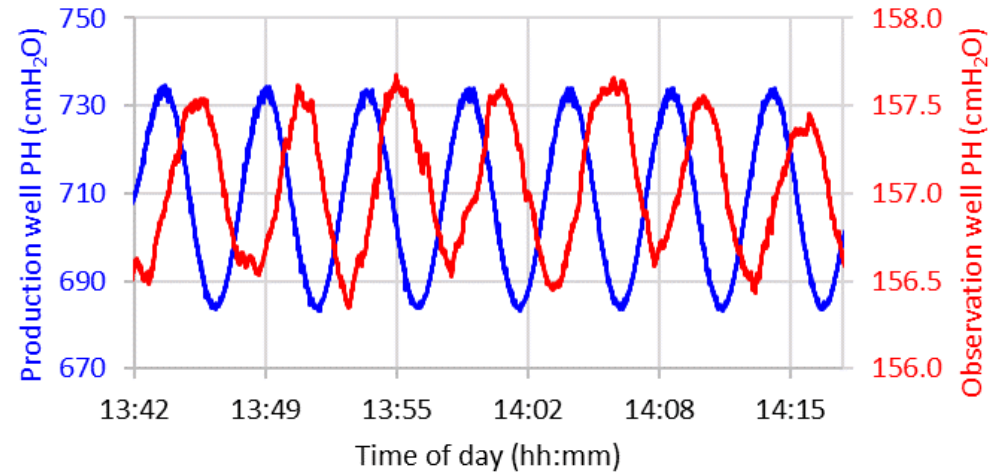

- Leaky **confined** aquifer (Pirramimma Sand)
- 80 mm diameter wells
 - Propagated sinusoidal signal up to 25 m



4. What are the **benefits** of sinusoidal slug testing?


Benefits – Logistical

Compared to traditional slug tests:


- **Better propagation** of sinusoidal signals
- **Easier detection** of responses to sinusoidal tests, even in the presence of background noise
- **More rapid** to undertake sinusoidal testing
- **More robust** estimation of storage, in addition to transmissivity
- **Lower uncertainty** of properties estimated, due to multiple replicates (cycles) within a single test



Benefits – Insight 1: Aquitard characterisation

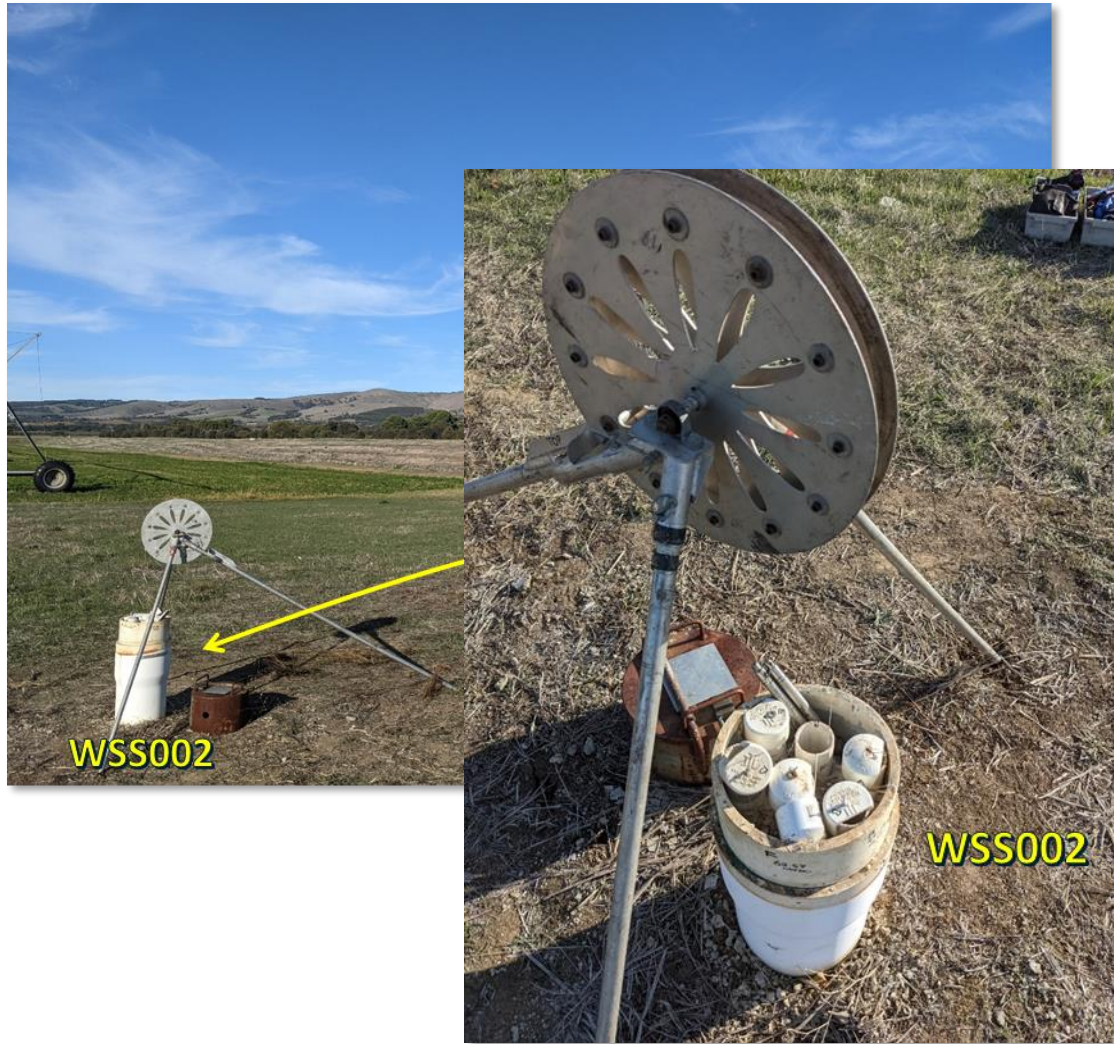


1.4 cm range

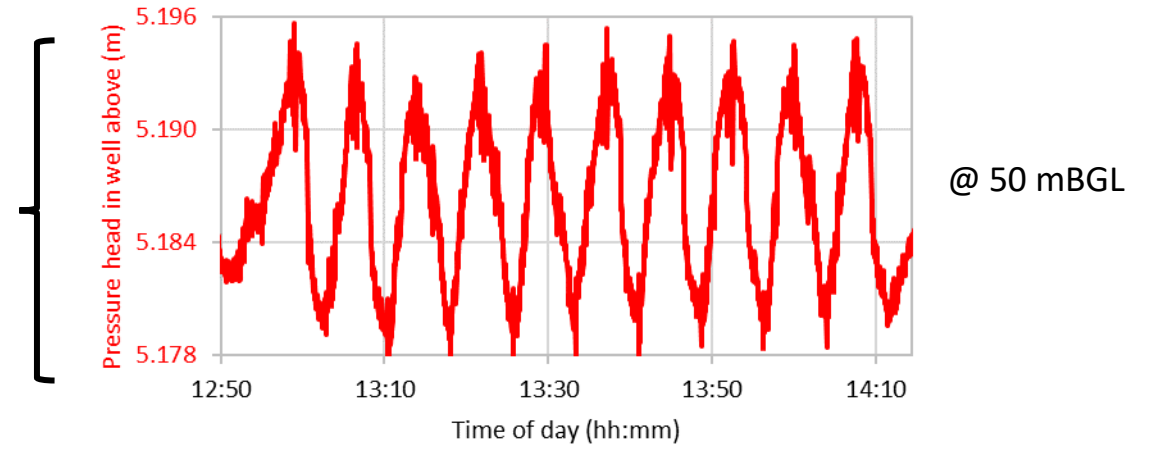

@ 50 mBGL

~4 m of intervening material

45 cm range

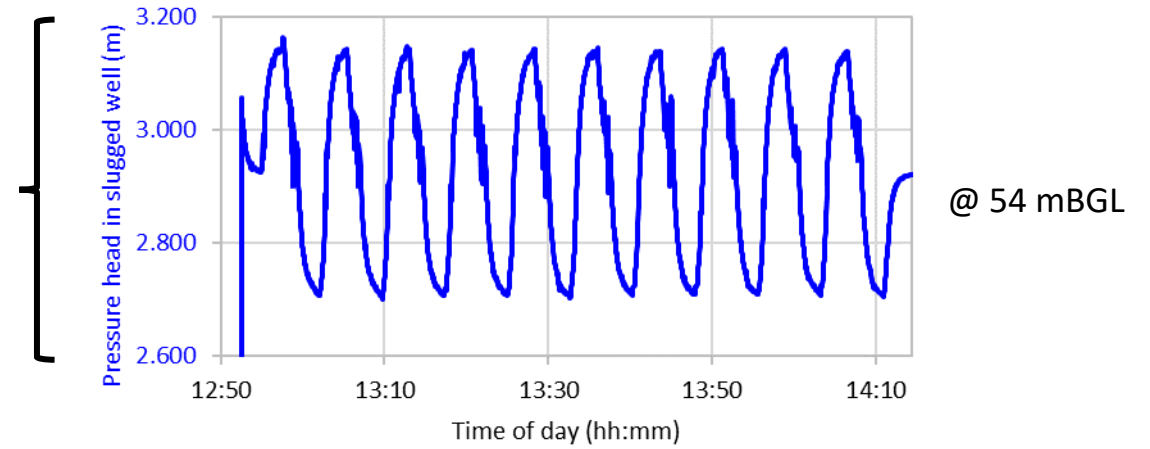

@ 54 mBGL

Benefits – Insight 2: Characterising dual domain flow in fractured rock aquifers

Context 1: Pumping tests


Late time effects; e.g. drainage

Early time effects; e.g. depressurisation

Context 2: Fractured rock aquifers

Slow response, e.g. matrix flow



Fast response; e.g. fracture flow

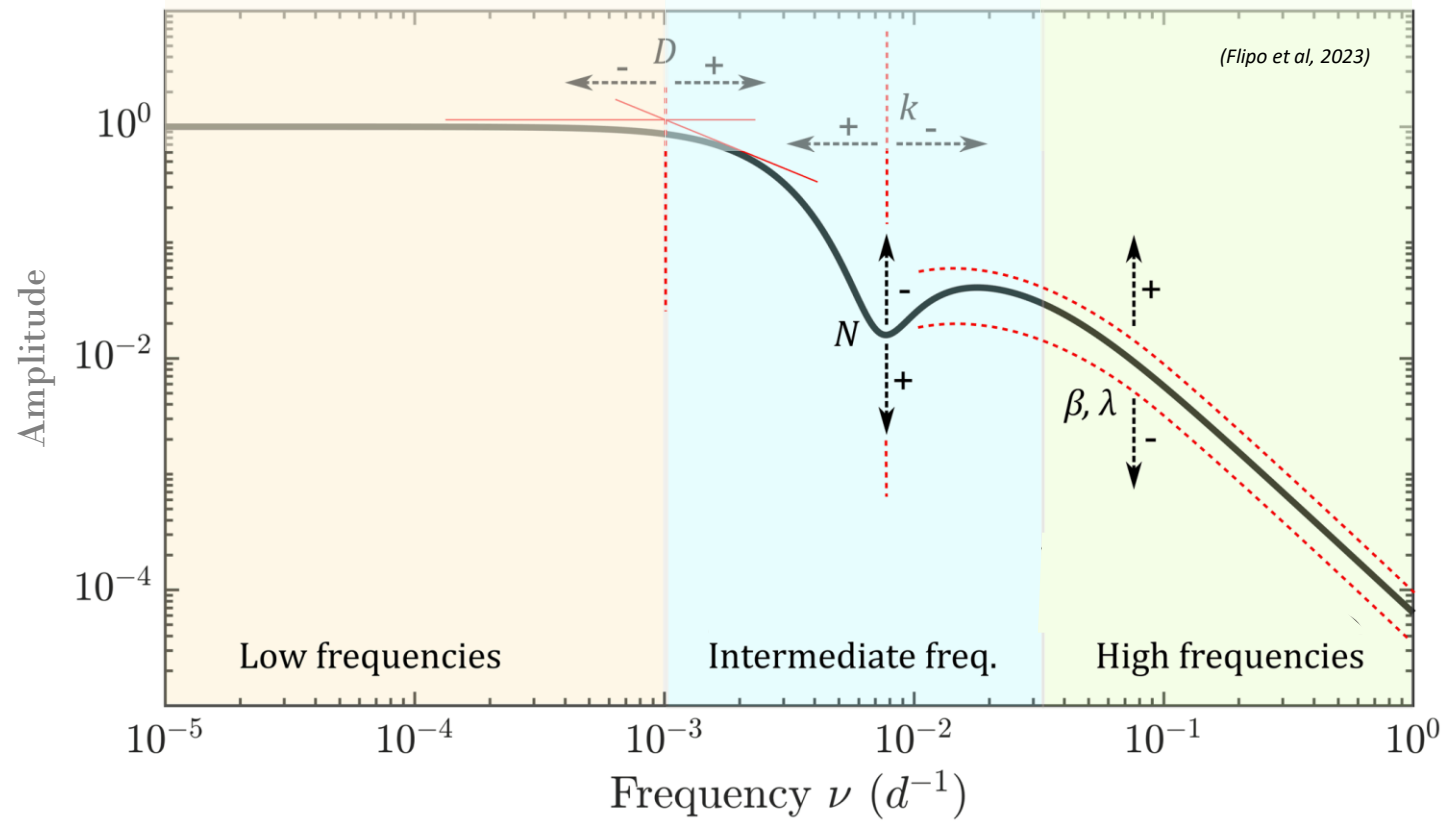

Benefits – Insight 2: Characterising dual domain flow in fractured rock aquifers

“Typical” sinusoidal slug test



Uses a single signal frequency

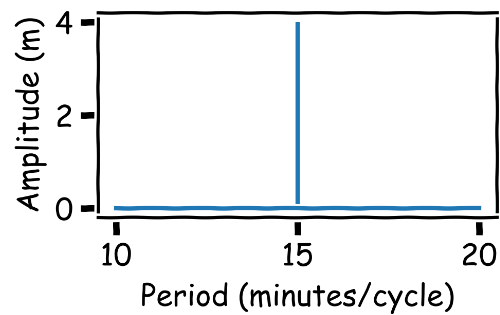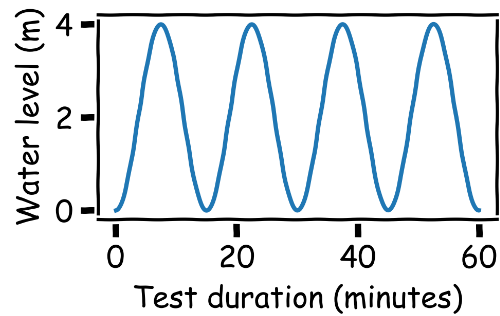

Benefits – Insight 2: Characterising dual domain flow in fractured rock aquifers



“Typical” sinusoidal slug test

Uses a single signal frequency

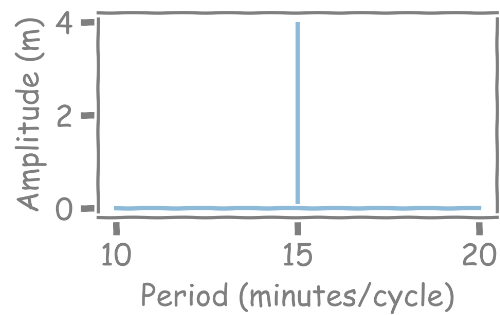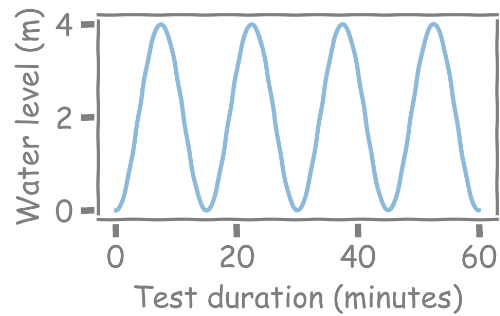

“Sweep” slug test

Sweeps continuously from low to high frequency

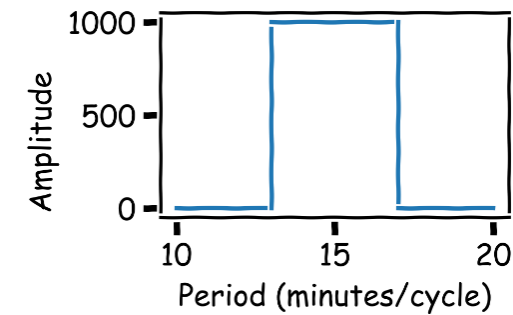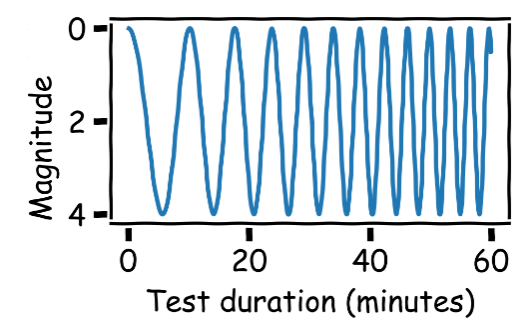

Benefits – Insight 2: Characterising dual domain flow in fractured rock aquifers

Context 1: Pumping tests


Late time effects; e.g. drainage

Early time effects; e.g. depressurisation

Context 2: Fractured rock aquifers

Slow response, e.g. matrix flow

Fast response; e.g. fracture flow

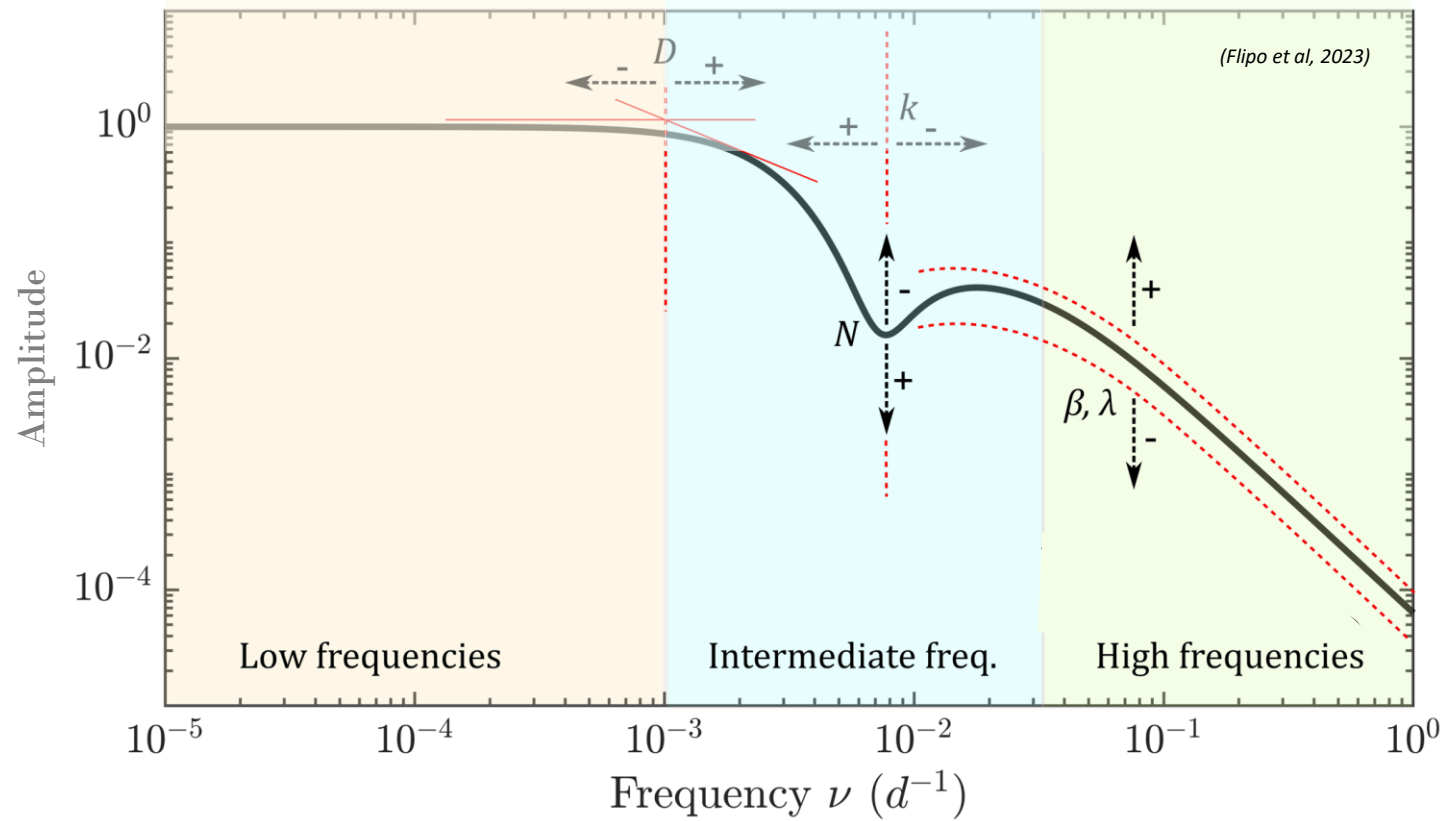


5. How are we making this research
accessible?

Partnering with Kremford Pty Ltd to make this research **accessible**

Partnering with Kremford Pty Ltd

- Ron Kreymborg and Kieran Harford
- Over 15 years' experience in providing solutions to industry involving **precise motor control**, including eye testing equipment, labelling and packaging machines and software
- Prior experience in electronic circuit design, microprocessor control, and software **commercialisation**
- Contracted in **2022** to develop precise control of electronically controlled winch
- Since **2023** have collaborated to design and assemble a comprehensive off-the-shelf system to perform for sinusoidal slug testing

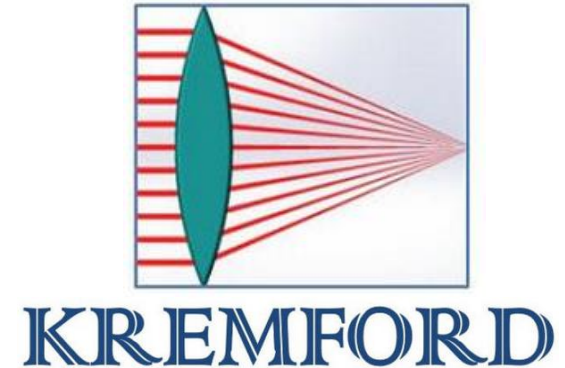

Partnering with Kremford Pty Ltd to make this research **accessible**

Kremford system for sinusoidal slug testing

Simplicity and portability

1. **Power source:** All devices powered using **DC batteries** (either 24V or 5V) to maximise portability
2. **Transportation:** All equipment contained within **6 hard cases**, each with a **maximum mass under 20kg**, to simplify transportation



Base station monitoring node with laptop visualisation



Portable electronically controlled winch



Wireless observation well node, including sensor and cable

Kremford system for sinusoidal slug testing

Automated control of slug movement

1. Extendable slug:

- Four 1.5-metre-long plastic sections can be connected to assemble up to a 6-metre-long slug
- 40 mm OD is suitable for use in 50 mm ID wells (piezometers) or larger

2. Electronic winch: A bespoke portable winch driven by a **specialised** DC stepper motor, allowing **precise control** at **low speeds**

3. Tripod: **Collapsible** tripod used to convey steel rope from winch to downhole slug



Kremford sinusoidal testing system


Kremford system for sinusoidal slug testing

Measurements presented in real-time

- 1. Monitoring:** Vented, **high resolution** (i.e., 3.5 metre range) pressure transducers for monitoring both production and observation well(s) at **5-second intervals**
- 2. Communication:** Observation well pressures sent **wirelessly** back to base station at production well
- 3. Visualisation:** All observations presented in **real-time** on a web-based app on a laptop or similar device
- 4. Software:** Bespoke software provided to estimate hydraulic properties from measurements **while in the field**

LIMAX AQUIFER TEST SYSTEM				SLUG POSITIONING	SITE SETUP	BASIC SINE	SINE SWEEP	DATA CONTROL	EQUIPMENT SETUP	SLUG QUICKLOOK
SINE TEST CONTROL										
You can select up to three independant sine waves. Each can have a different period and phase. The amplitudes are relative to each other. For example anlitudes of 1, 1 and 2 will mean SINE 3 will have twice the amplitude of SINE1 and SINE 2. The total slug travel sets the actual amplitude.										
SINE 1	PERIOD	AMPLITUDE	PHASE							
	<input type="text" value="40"/>	<input type="text" value="20"/>	<input type="text" value="0"/>							
SINE 2	PERIOD	AMPLITUDE	PHASE							
<input type="button" value="ENABLE"/>	<input type="text" value="35"/>	<input type="text" value="20"/>	<input type="text" value="0"/>							
SINE 3	PERIOD	AMPLITUDE	PHASE							
<input type="button" value="ENABLE"/>	<input type="text" value="32"/>									
TEST PERIOD (MINS)	TOTAL TRAVEL (CMS)									
<input type="text" value="120"/>	<input type="text" value="50"/>									
RUNTIME (MINS)	SENSOR 1									
<input type="text" value="0:00:00"/>	0.602293 cmH2O 21.5486 C									

Sine test set-up page

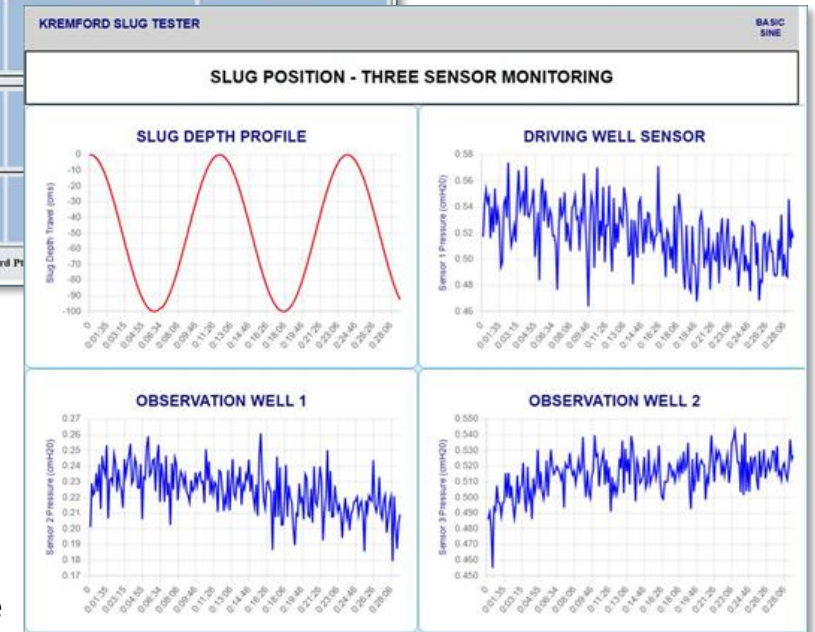

Sine test output page

Wrapping up

The “take home” messages from **us**

1. **Sinusoidal slug testing** can be used to reliably estimate subsurface **hydraulic properties**, including both the **transmissivity** and **storage** of aquifers, and potentially aquitards
2. This method combines the **benefits** of slug testing with the **advantages** of using a **frequency-based** approach
3. The CSIRO, Flinders University, and the University of Georgia have partnered with **Kremford Pty Ltd** to **commercialise** this research for uptake by **industry**

Thank you for listening!



The “take home” messages from **you!**

- From **your** experiences, what **limitations** have you found with slug testing?
- Do **you** see a role for **this method** in assisting contaminated site assessments?
- Would **you** see value in a **pump-based** equivalent of this system?



References cited

- Black, JH and Kipp Jr, KL (1981). Determination of hydrogeological parameters using sinusoidal pressure tests: A theoretical appraisal, *Water Resources Research* 17(3): 686-692.
- Butler Jr, JJ (2019). *The Design, Performance, and Analysis of Slug Tests*, 2nd edition, CRC Press, Boca Raton, Florida, USA, 281p.
- Chapuis, RP (2015). Overdamped slug tests in aquifers: the three diagnostic graphs for a user-independent interpretation, *Geotechnical Testing Journal* 38(4): 474-489.
- Cooper Jr, HH, Bredehoeft, JD, and Papadopulos, IS (1967). Response of a finite diameter well to an instantaneous charge of water, *Water Resources Research* 3(1): 263-269.
- Flipo, N, Gallois, N, and Schuite, J (2023). Regional coupled surface–subsurface hydrological model fitting based on a spatially distributed minimalist reduction of frequency domain discharge data, *Geoscientific Model Development* 16(1): 353-381.
- Guiltinan, E, and Becker, MW (2015). Measuring well hydraulic connectivity in fractured bedrock using periodic slug tests, *Journal of Hydrology* 521: 100-107.
- Hasanov, AK, Dugan, B, Batzle, ML, and Prasad, M (2019). Hydraulic and poroelastic rock properties from oscillating pore pressure experiments, *Journal of Geophysical Research: Solid Earth* 124(5): 4473-4491.
- Rasmussen, TC, Haborak, KG, and Young, MH (2003). Estimating aquifer hydraulic properties using sinusoidal pumping at the Savannah River site, South Carolina, USA, *Hydrogeology Journal*, 11: 466-482.



Building leaders in the sustainable management of **contaminated land and groundwater**

Australasian Land & Groundwater Association

www.landandgroundwater.com

+61 2 4885 1136